FCZI P

Fan coil unit for ducted installations

Cooling capacity 0,89 ÷ 8,60 kW
Heating capacity 2,02 ÷ 17,02 kW

- **Electric saving equal to 50% with respect to a fan coil with 3-speed motor**
- **Suitable for duct-type installations too**
- **Total comfort: reduced variations in temperature and relative humidity**
- **Vertical and horizontal installation**
- **Very quiet**



EUROVENT CERTIFIED PERFORMANCE
www.eurovent-certification.com

DESCRIPTION

fan coil can be installed in any 2/4 pipe system and operates with any heat generator even at low temperatures, and thanks to varied versions and settings, it is easy to pick the ideal solution for any need.

FEATURES

Ventilation group

Centrifugal fans in anti-static plastic material with aerofoil profile designed to achieve high airflows and pressures whilst at the same time producing low noise.
Their characteristics permit energy savings compared to conventional fans.
They are statically and dynamically balanced and directly coupled to the motor shaft.
The Brushless electric motor with 0-100% continuous speed variation, which allows precise adaptation to the real demands of the internal environment without temperature fluctuations.

Finned pack heat exchanger

With copper pipes and aluminium louvers, the standard or oversized heat exchanger and the possible secondary heat exchanger have female gas water connections on the left side and the manifolds have air vents.
The coil is not suitable for use in corrosive atmosphere or in environments where aluminium may be subject to corrosion.
Reversibility of the water connections during installation only for units with a standard or boosted main heat exchanger, or standard with BV accessory. Not reversible in all other configurations. In any case, units with the coil water connections on the right are available at the time of ordering.

Condensate drip


Provided standard in plastic and fixed to the interior structure; with external condensate discharge.

Air filter

Air filter class Coarse 25% for all versions easy to pull out and clean.

VERSIONS

Flush-mounting and duct-type versions

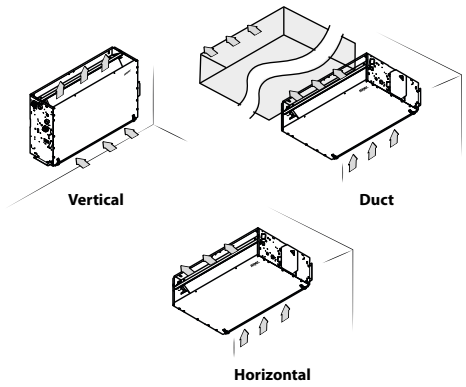

In the standard configuration there is no useful static pressure available. If necessary for canaled installations, you must act on the engine dip switches, for more details refer to the technical documentation.

GUIDE TO SELECTING THE POSSIBLE CONFIGURATIONS

Field		Description
1,2,3,4		**FCZI**
5		**Size** 2, 3, 4, 5, 7, 9
6		**main heat exchanger**
	0	Standard
	5	Oversized
7		**Secondary heat exchanger**

Field		Description
	0	Without coil
	1	Standard
	2	Oversized (on request only)
8		**Version**
	P	Flush-mounting, without cabinet
	PR	Flush-mounting, without cabinet, with water connections on right-hand side

SIZE AVAILABLE FOR VERSION

Size		200	201	202	250	300	301	302	350	400	401	402	450
Versions produced (by size)													
Versions available (by size)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•

		500	501	502	550	700	701	702	750	900	901	950
Versions produced (by size)												
Versions available (by size)	P,PR	•	•	•	•	•	•	•	•	•	•	•

ACCESSORIES

Control panels

AER503IR: Flush-mounting thermostat with backlit display, capacitive keypad and infrared receiver, for controlling both brushless fan coils and those with an asynchronous motor. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices (Cold Plasma and germicidal lamp), with radiant plate or with FCZ-D twin delivery (Dualjet). In addition, it can control systems with radiant panels or mixed (fan coil and radiant floor) systems. Being equipped with an infrared receiver, it can, in turn, be controlled by the VMF-IR remote control.
PRO503: Wall box for AER503IR and VMF-E4 thermostats.
PXAI: Thermostat on the machine for controlling the fan coils (both with asynchronous and brushless motors), complete with water and air probes to be positioned in the relative seats, and a plastic support to fix it on the side of the unit. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, purifier devices (Cold Plasma and germicidal lamp), or radiant plate.
SA5: air probe kit (L = 15 m) with probe-locking cable grommet.
SW3: Water probe (L = 2.5 m) for controlling the minimum and maximum and to allow automatic seasonal switching for electronic thermostats fitted with water side changeover.
SW5: water probe kit (L = 15m) with probe-holder connection point, fixing clip and probe-holder from heat exchanger.
TX: Wall-mounting thermostat for controlling either brushless fan coils or those with asynchronous motors for 2/4 pipe. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices, radiant plate or FCZ-D twin delivery (Dualjet).

AerSuite

The AerSuite application is used to remotely control the DI24 user interface, with VMF-E19/VMF-E19I thermostats, using Smart Devices with iOS and Android operating systems.
This is an application for Smartphones and Tablets with which the user can access and control the system operation remotely.
For more information about the use of the application and the available functions, refer to the respective documentation on the website.



VMF system

DI24: Flush-mounted interface (503 box) with 2.4" touch screen display to be combined with VMF-E19, VMF-E19I accessories. It allows you to regulate and monitor the temperature inside rooms precisely and on time; in addition to accessing and interacting with your system's operating information, parameters and alarms, it allows you to set time slots. Thanks to its Wi-Fi connection, DI24 in combination with the AerSuite APP (available for Android and iOS) can also be remotely controlled. All programming and most functions are done in a simple and intuitive way using the APP. To allow for customization of the interface so that it seamlessly integrates with the style of any home, DI24 is compatible with switch plates from major brands available on the market. For more information, please refer to our documentation. However, a switch plate with its graphite gray support, DI24CP, is also available as a separate accessory in our catalog.
VMF-DSK: User interface with an easy-to-read light display that provides clear information on room temperature, programming settings and more. Thanks to the ergonomic ring nut switch, adjusting the desired temperature is very easy. The knob allows precise and immediate adjustments, offering a classic but highly effective control mode. Not only functional, but also aesthetically pleasing. Our interface features a modern, compact design that fits perfectly in any environment, adding a touch of style to your home or office. It is available in white (VMF-DSK) and black (VMF-DSKD).
VMF-E19I: Thermostat for inverter unit to be fixed on the side of the fan coil, fitted as standard with an air and water probe.
VMF-E3: Wall-mounted user interface, also controllable via VMF-IR control.
VMF-E4DX: Wall-mounted user interface. Grey front panel PANTONE 425C (METAL).
VMF-E4X: Wall-mounted user interface. Light grey front panel PANTONE COOL GRAY 1C.
VMF-IR: User interface compatible with AER503IR, VMF-E3 thermostat.
VMF-SW: Water probe (L = 2.5m) used if required in place of the standard unit supplied with the VMF-E19 and VMF-E19I thermostats for mounting it upstream of the valve.
VMF-SW1: Additional water probe (L = 2.5m) to be used if required for 4-pipe systems with the VMF-E19 and VMF-E19I thermostats for maximum control in the cold range
VMHI: The VMHI panel can be used as a user interface. What determines the function to be performed by the user interface is determined by its correct parametrisation and by following the electrical connections between interface and thermostat or interface and plenum.

Water valves

VCZ_X: 3-way valve kit for single-coil fan coil, RH connections, (VCZ_X4R) or LH (VCZ_X4L) for 4-pipe systems. With totally separate "heating" and "cooling" circuits. This kit consists of two 3-way insulated valves and four connections, complete with electrothermal actuators, insulating shells for the valves, and the relative hydraulic couplings. X4L version for fan coils with LH connections, and X4R for fan coils with RH connections. 230V~50Hz power supply.
VCZ41: 3-way motorised valve kit for the main coil. The kit is made up of a valve with its insulating shell, actuator and relative hydraulic fittings. It can be installed on fan coils with both right and left connections. If the valve is combined with the BCZ5 or BCZ6 condensate drain pan, to ensure a better housing it is possible to remove the insulating shell.
VCZ4124: 3-way motorised valve kit for the main coil. The kit is made up of a valve with its insulating shell, actuator and relative hydraulic fittings. It can be installed on fan coils with both right and left connections. If the valve is

combined with the BCZ5 or BCZ6 condensate drain pan, to ensure a better housing it is possible to remove the insulating shell.
VCZ42: 3-way motorised valve kit for the main coil. The kit includes the valve with insulating shell, the actuator and the hydraulic fittings. It is compatible with installation on fan coils with hydraulic connections both on the left and on the right. In combination with the condensate basins BCZ5 and BCZ6, the insulating shell can be removed to facilitate the housing of the valve assembly.
VCZ4224: 3-way motorised valve kit for the main coil. The kit includes the valve with insulating shell, the actuator and the hydraulic fittings. It is compatible with installation on fan coils with hydraulic connections both on the left and on the right. In combination with the condensate basins BCZ5 and BCZ6, the insulating shell can be removed to facilitate the housing of the valve assembly.
VCZ43: 3-way motorised valve kit for the main coil. The kit is made up of a valve with its insulating shell, actuator and relative hydraulic fittings. It can be installed on fan coils with both right and left connections. If the valve is combined with the BCZ5 or BCZ6 condensate drain pan, to ensure a better housing it is possible to remove the insulating shell.
VCZ4324: 3-way motorised valve kit for the main coil. The kit includes the valve with insulating shell, the actuator and the hydraulic fittings. It is compatible with installation on fan coils with hydraulic connections both on the left and on the right. In combination with the condensate basins BCZ5 and BCZ6, the insulating shell can be removed to facilitate the housing of the valve assembly.
VCF44 - 45 - for secondary heat exchanger: The 3-way motorised valve kit for the secondary coil heat only. The kit consists of a valve with its insulating shell, actuator and relevant water fittings; it is suitable to be installed on the fan coils with right and left water connections.
VCZD: 2-way motorised valve kit. The kit consists of a valve, an actuator and the relative pipe fittings. It can be installed on fan coils with both right and left connections.
VJP: Control and balancing combination valve for 2 and 4 pipe systems to install outside the unit, supplied without fittings and hydraulic components. The valve, which can guarantee a constant water flow rate in the terminal, within its operating range.

(Heating only) additional coil
BV: Hot water heat exchanger with 1 row.

Installation accessories
AMP: Wall mounting kit
DSC: Condensate drainage device.
BC: Condensate drip.
BCZ: Condensate drip. If the valve is paired with the BCZ5 or BCZ6 condensate drip tray, the insulating shell can be removed to ensure better housing.
Ventilcassaforma: Galvanised sheet metal template. It makes it possible to obtain directly in the wall a space for housing the fan coil.
MZA: Cabinet housing with fixed fins.
MZU: Cabinet housing with adjustable fins.
GA: Intake grid with fixed louvers
GA_Z: Intake grid with fixed louvers in RAL 9003 colour.
GAF: Intake grid with filter and fixed louvers
GAF_Z: Intake grid with filter and fixed louvers in RAL 9003 colour.
GM: Flow grid with adjustable louvers.
GM_Z: Outlet grid with fixed louvers in RAL 9003 colour.
PA: Intake plenum in galvanised sheet metal, complete with suction couplings for circular-section ducts.
PAF: Intake plenum providing recovery and delivery on the same side, for all installations where the machine needs to be positioned outside the air conditioned rooms to minimise the noise levels and facilitate maintenance.
PM: Galvanised sheet steel flow plenum, externally insulated, equipped with plastic flow fittings for ducts and circular sections.
RD: Straight delivery coupling for canalisation.
RDA: Straight suction coupling for canalisation.
RP: 90° delivery coupling.
RPA: 90° suction coupling.

Accessories for ducting
MZC: Plenum with motorised dampers.
RDA_V: Straight intake connection with rectangular flange.
RPA_V: Suction plenum with rectangular flange; both sides have a circular push-out Ø 150mm that can be removed.
RDA_C: Straight intake connection with circular flanges.
PA_V: Suction plenum with circular plastic flanges; both sides have a circular push-out Ø 150mm that can be removed.
PM_V: Internally insulated delivery plenum with circular flanges; both sides have a circular push-out Ø 150mm that can be removed.
RPM_V: Internally insulated delivery plenum with rectangular flange; both sides have a circular push-out Ø 150mm that can be removed.
RDM_V: Straight delivery coupling in galvanised sheet metal.
RDM_C: Straight discharge internally insulated, with circular flanges.
RDAF: Straight suction fitting with a rectangular flange, made of galvanized sheet metal, allows a rectangular-section duct to be connected to the unit's suction inlet, ensuring both lateral and bottom filter extraction.

ACCESSORIES COMPATIBILITY

Control panels

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
AER503IR (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
PRO503	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
PXAI	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SA5 (2)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SW3 (2)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SW5 (2)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
TX (3)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

(1) Wall-mount installation.
(2) Probe for AER503IR-TX thermostats, if fitted.
(3) Wall-mounting. If the unit intake exceeds 0.7A, or several units need to be managed with a single thermostat, board SIT3 and/or SIT5 is required.

VMF system
For more information about VMF system, refer to the dedicated documentation.

VMF system

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
DI24	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-DSK	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-E19I (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-E3	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-E4DX	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-E4X	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-IR	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-SW	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMF-SW1	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
VMHI	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

(1) Mandatory accessory.

Water valves

Valve Kit for 4 pipe systems

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
VCZ1X4L (1)	P,PR	•			•																			
VCZ1X4R (1)	P,PR	•			•																			
VCZ2X4L (1)	P,PR					•			•	•			•	•				•	•			•			
VCZ2X4R (1)	P,PR					•			•	•			•	•				•	•			•			
VCZ3X4L (1)	P,PR																						•	•
VCZ3X4R (1)	P,PR																						•	•

(1) The valves can be combined with the units if there is a control panel for managing them.

3 way valve kit

	200	201	202	250	300	301	302	350	400	401	402	450
Main coil	VCZ41 VCZ4124	VCZ41 VCZ4124	VCZ41 VCZ4124	VCZ41 VCZ4124	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224
Secondary coil	-	VCF44 VCF4424	VCF44 VCF4424	-	-	VCF44 VCF4424	VCF44 VCF4424	-	-	VCF44 VCF4424	VCF44 VCF4424	-
Additional coil "BV"	VCF44 VCF4424	-	-	-	VCF44 VCF4424	-	-	-	VCF44 VCF4424	-	-	-

	500	501	502	550	700	701	702	750	900	901	950
Main coil	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ42 VCZ4224	VCZ43 VCZ4324	VCZ43 VCZ4324	VCZ43 VCZ4324
Secondary coil	-	VCF44 VCF4424	VCF44 VCF4424	-	-	VCF44 VCF4424	VCF44 VCF4424	-	-	VCF45 VCF4524	-
Additional coil "BV"	VCF44 VCF4424	-	-	-	VCF44 VCF4424	-	-	-	VCF45 VCF4524	-	-

VCF41 - 42 - 43; VCF44 - 45 (230V~50Hz)
VCF4124 - 4224 - 4324; VCF4424 - 4524 (24V)

2 way valve kit

	200	201	202	250	300	301	302	350	400	401	402	450
Main coil	VCZD1 VCZD124	VCZD1 VCZD124	VCZD1 VCZD124	VCZD1 VCZD124	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224
Secondary coil	-	VCFD4 VCFD424	VCFD4 VCFD424	-	-	VCFD4 VCFD424	VCFD4 VCFD424	-	-	VCFD4 VCFD424	VCFD4 VCFD424	-
Additional coil "BV"	VCFD4 VCFD424	-	-	-	VCFD4 VCFD424	-	-	-	VCFD4 VCFD424	-	-	-

	500	501	502	550	700	701	702	750	900	901	950
Main coil	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD2 VCZD224	VCZD3 VCZD324	VCZD3 VCZD324	VCZD3 VCZD324
Secondary coil	-	VCFD4 VCFD424	VCFD4 VCFD424	-	-	VCFD4 VCFD424	VCFD4 VCFD424	-	-	VCFD4 VCFD424	-
Additional coil "BV"	VCFD4 VCFD424	-	-	-	VCFD4 VCFD424	-	-	-	VCFD4 VCFD424	-	-

VCZD1 - 2 - 3; VCFD4 (230V~50Hz)
VCZD124 - 224 - 324; VCF424 (24V)

Combined Adjustment and Balancing Valve Kit

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
VJP060 (1)	P,PR	•	•	•	•	•	•	•	•															
VJP060M (2)	P,PR	•	•	•	•	•	•	•	•															
VJP090 (1)	P,PR									•	•	•	•	•	•	•	•							
VJP090M (2)	P,PR									•	•	•	•	•	•	•	•							
VJP150 (1)	P,PR																	•	•	•	•	•	•	•
VJP150M (2)	P,PR																	•	•	•	•	•	•	•

(1) 230V~50Hz
(2) 24V

(Heating only) additional coil

Heating only additional coil

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
BV122 (1)	P,PR	•																						
BV132 (1)	P,PR					•																		
BV142 (1)	P,PR									•				•										
BV162 (1)	P,PR																					•		
BVZ800 (1)	P,PR																	•						

(1) Not available for sizes with oversized main coil.

Installation accessories

Wall mounting kit

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
AMP20	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
AMPZ	P,PR																	•	•	•	•	•	•	•

Condensate drip

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
BCZ4 (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
BCZ5 (2)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
BCZ6 (2)	P,PR																					•	•	•

(1) For vertical installation.
(2) For horizontal installation.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
BC8 (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
BC9 (1)	P,PR																					•	•	•

(1) For horizontal installation.

Condensate recirculation device

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
DSCZ4 (1)	P,PR	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

(1) DSCZ4 due to space problems inside the unit, the VCZ1-2-3-4 X4L/R valves cannot be mounted together with the amp/AMPZ accessories, with all the condensate collection trays. With the VMF-E19/E19I thermostats, please contact the head office.

Ventilcassaforma

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
CHF22	P,PR	•	•	•	•																			
CHF32	P,PR					•	•	•	•															
CHF42	P,PR									•	•	•	•	•	•	•	•							
CHF62	P,PR																	•	•	•	•	•	•	•

Cabinet housing with fixed fins.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
MZA200	P,PR	•	•	•	•																			
MZA300	P,PR					•	•	•	•															
MZA500	P,PR									•	•	•	•	•	•	•	•							
MZA800	P,PR																	•	•	•	•			
MZA900	P,PR																					•	•	•

Cabinet housing with adjustable fins.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
MZU100	P,PR	•	•	•	•																			
MZU300	P,PR					•	•	•	•															
MZU500	P,PR									•	•	•	•	•	•	•	•							
MZU800	P,PR																	•	•	•	•			
MZU900	P,PR																					•	•	•

Wall mounting and duct type installation accessories

Lower intake grille

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
GA22	P,PR	•	•	•	•																			
GA32	P,PR					•	•	•	•															
GA42	P,PR									•	•	•	•	•	•	•	•							
GA62	P,PR																	•	•	•	•	•	•	•

Lower intake grille

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
GA200Z (1)	P,PR	•	•	•	•																			
GA300Z (1)	P,PR					•	•	•	•															
GA400Z (1)	P,PR									•	•	•	•	•	•	•	•							
GA600Z (1)	P,PR																	•	•	•	•	•	•	•

(1) In order to be used on the units, the following accessories require a connection (duct) to be made by the user depending on the distance between the position of the unit and the positioning of the intake/outlet grilles. The grilles cannot be directly coupled to the unit.

Intake grilles with fixed louvers and filter

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
GAF22	P,PR	•	•	•	•																			
GAF32	P,PR					•	•	•	•															
GAF42	P,PR									•	•	•	•	•	•	•	•							
GAF62	P,PR																	•	•	•	•	•	•	•

Intake grilles with fixed louvers and filter

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
GAF200Z (1)	P,PR	•	•	•	•																			
GAF300Z (1)	P,PR					•	•	•	•															
GAF400Z (1)	P,PR									•	•	•	•	•	•	•	•							

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
GAF600Z (1)	P,PR																	•	•	•	•	•	•	•

(1) In order to be used on the units, the following accessories require a connection (duct) to be made by the user depending on the distance between the position of the unit and the positioning of the intake/outlet grilles. The grilles cannot be directly coupled to the unit.

Delivery grilles with adjustable louvers

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
GM22	P,PR	•	•	•	•																			
GM32	P,PR					•	•	•	•															
GM42	P,PR									•	•	•	•	•	•	•	•							
GM62	P,PR																	•	•	•	•	•	•	•

Intake plenum in sheet metal complete with connectors for circular channels

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
PA22	P,PR	•	•	•	•																			
PA32	P,PR					•	•	•	•															
PA42	P,PR									•	•	•	•	•	•	•	•							
PA62	P,PR																	•	•	•	•	•	•	•

Intake plenum providing recovery and delivery on the same side

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
PA22F	P,PR	•	•	•	•																			
PA32F	P,PR					•	•	•	•															
PA42F	P,PR									•	•	•	•	•	•	•	•							
PA62F	P,PR																	•	•	•	•	•	•	•

Delivery plenum with circular flanges.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
PM22	P,PR	•	•	•	•																			
PM32	P,PR					•	•	•	•															
PM42	P,PR									•	•	•	•	•	•	•	•							
PM62	P,PR																	•	•	•	•	•	•	•

Straight delivery coupling

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RD22	P,PR	•	•	•	•																			
RD32	P,PR					•	•	•	•															
RD42	P,PR									•	•	•	•	•	•	•	•							
RD62	P,PR																	•	•	•	•	•	•	•

Straight suction coupling

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RDA22	P,PR	•	•	•	•																			
RDA32	P,PR					•	•	•	•															
RDA42	P,PR									•	•	•	•	•	•	•	•							
RDA62	P,PR																	•	•	•	•	•	•	•

90° delivery coupling.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RP22	P,PR	•	•	•	•																			
RP32	P,PR					•	•	•	•															
RP42	P,PR									•	•	•	•	•	•	•	•							
RP62	P,PR																	•	•	•	•	•	•	•

90° suction coupling.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RPA22	P,PR	•	•	•	•																			
RPA32	P,PR					•	•	•	•															
RPA42	P,PR									•	•	•	•	•	•	•	•							
RPA62	P,PR																	•	•	•	•	•	•	•

Accessories for ducting

Plenum with motorised dampers.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
MZC220	P,PR	•	•	•	•																			
MZC320	P,PR					•	•	•	•															
MZC530	P,PR									•	•	•	•	•	•	•	•							
MZC830	P,PR																	•	•	•	•	•	•	•

Straight intake connection with rectangular flange.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RDA000V	P,PR	•	•	•	•																			
RDA100V	P,PR					•	•	•	•															
RDA200V	P,PR									•	•	•	•	•	•	•	•							
RDA300V	P,PR																	•	•	•	•	•	•	•

Intake plenum with rectangular flange.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RPA000V	P,PR	•	•	•	•																			
RPA100V	P,PR					•	•	•	•															
RPA200V	P,PR									•	•	•	•	•	•	•	•							
RPA300V	P,PR																	•	•	•	•	•	•	•

Suction plenum with plastic circular flanges.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
PA000V	P,PR	•	•	•	•																			
PA100V	P,PR					•	•	•	•															
PA200V	P,PR									•	•	•	•	•	•	•	•							
PA300V	P,PR																	•	•	•	•	•	•	•

Internally insulated delivery plenum with circular flanges.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
PM000V	P,PR	•	•	•	•																			
PM100V	P,PR					•	•	•	•															
PM200V	P,PR									•	•	•	•	•	•	•	•							
PM300V	P,PR																	•	•	•	•	•	•	•

Internally insulated delivery plenum with rectangular flange.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RPM000V	P,PR	•	•	•	•																			
RPM100V	P,PR					•	•	•	•															
RPM200V	P,PR									•	•	•	•	•	•	•	•							
RPM300V	P,PR																	•	•	•	•	•	•	•

Straight delivery coupling in galvanised sheet metal.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RDM000V	P,PR	•	•	•	•																			
RDM100V	P,PR					•	•	•	•															
RDM200V	P,PR									•	•	•	•	•	•	•	•							
RDM300V	P,PR																	•	•	•	•	•	•	•

Straight discharge internally insulated, with circular flanges.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RDMC000V	P,PR	•	•	•	•																			
RDMC100V	P,PR					•	•	•	•															
RDMC200V	P,PR									•	•	•	•	•	•	•	•							
RDMC300V	P,PR																	•	•	•	•	•	•	•

Straight suction fitting with side or bottom extraction filter.

Model	Ver	200	201	202	250	300	301	302	350	400	401	402	450	500	501	502	550	700	701	702	750	900	901	950
RDAF200	P,PR	•	•	•	•																			
RDAF300	P,PR					•	•	•	•															
RDAF500	P,PR									•	•	•	•	•	•	•	•							
RDAF900	P,PR																	•	•	•	•	•	•	•

PERFORMANCE DATA FOR UNITS WITHOUT HEAD (EUROVENT CERTIFICATE FC-H)

2-pipe

		FCZI200P			FCZI250P			FCZI300P			FCZI350P			FCZI400P			FCZI450P		
		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)																			
Heating capacity	kW	2,02	2,95	3,70	2,20	3,18	4,05	3,47	4,46	5,50	3,77	4,92	6,15	4,32	5,74	7,15	4,57	6,29	7,82
Water flow rate system side	l/h	177	258	324	193	278	355	304	391	482	330	431	539	379	503	627	400	551	685
Pressure drop system side	kPa	6	12	18	7	15	23	7	12	18	8	14	20	9	16	24	6	11	16
Heating performance 45 °C / 40 °C (2)																			
Heating capacity	kW	1,00	1,46	1,84	1,09	1,58	2,01	1,72	2,21	2,73	1,87	2,44	3,06	2,14	2,85	3,55	2,27	3,12	3,88
Water flow rate system side	l/h	174	254	319	190	274	350	299	385	475	325	425	531	373	495	617	394	543	675
Pressure drop system side	kPa	6	12	18	8	15	22	8	12	18	8	14	20	10	16	24	6	11	16
Cooling performance 7 °C / 12 °C (3)																			
Cooling capacity	kW	0,89	1,28	1,60	1,06	1,55	1,94	1,68	2,17	2,65	1,89	2,46	3,02	2,20	2,92	3,60	2,41	3,21	4,03
Sensible cooling capacity	kW	0,71	1,05	1,33	0,79	1,20	1,52	1,26	1,65	2,04	1,33	1,76	2,18	1,59	2,14	2,67	1,69	2,30	2,90
Water flow rate system side	l/h	153	221	275	182	267	334	288	374	456	350	460	560	379	503	619	414	552	694
Pressure drop system side	kPa	6	12	18	8	17	25	8	13	18	11	18	25	10	16	24	9	15	22
Fan																			
Type	type	Centrifugal			Centrifugal			Centrifugal			Centrifugal			Centrifugal			Centrifugal		
Fan motor	type	Inverter			Inverter			Inverter			Inverter			Inverter			Inverter		
Number	no.	1			1			2			2			2			2		
Air flow rate	m^3/h	140	220	290	140	220	290	260	350	450	260	350	450	330	460	600	330	460	600
Input power	W	7	8	14	7	8	14	5	7	13	5	7	13	5	10	18	5	10	18
Signal 0-10V	%	44	68	90	44	68	90	52	70	90	52	70	90	49	68	90	49	68	90
Fan coil sound data (4)																			
Sound power level	dB(A)	35,0	46,0	51,0	35,0	46,0	51,0	34,0	41,0	48,0	34,0	41,0	48,0	37,0	44,0	51,0	37,0	44,0	51,0
Sound pressure level	dB(A)	27,0	38,0	43,0	27,0	38,0	43,0	26,0	33,0	40,0	26,0	33,0	40,0	29,0	36,0	43,0	29,0	36,0	43,0
Finned pack heat exchanger																			
Water content main heat exchanger	l	0,5			0,7			0,8			1,0			1,0			1,4		
Diametre hydraulic fittings																			
Main heat exchanger	Ø	1/2"			1/2"			3/4"			3/4"			3/4"			3/4"		

		FCZI500P			FCZI550P			FCZI700P			FCZI750P			FCZI900P			FCZI950P		
		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)																			
Heating capacity	kW	5,27	7,31	8,50	5,82	8,34	9,75	8,10	9,80	11,00	9,10	11,30	12,50	10,77	13,35	15,14	11,20	14,42	17,10
Water flow rate system side	l/h	462	641	745	510	731	855	710	860	964	798	991	1.096	945	1.171	1.328	982	1.264	1.500
Pressure drop system side	kPa	12	21	28	10	20	26	17	24	29	10	15	18	12	17	22	16	24	33
Heating performance 45 °C / 40 °C (2)																			
Heating capacity	kW	2,62	3,63	4,22	2,89	4,41	4,85	4,03	4,87	5,47	4,52	5,62	6,21	5,35	6,64	7,53	5,57	7,17	8,50
Water flow rate system side	l/h	455	631	734	502	720	842	699	846	950	786	975	1.079	930	1.152	1.307	967	1.245	1.476
Pressure drop system side	kPa	12	21	28	15	28	37	16	24	29	10	14	18	12	17	22	15	24	33
Cooling performance 7 °C / 12 °C (3)																			
Cooling capacity	kW	2,68	3,69	4,25	2,91	4,13	4,79	3,92	4,89	5,50	4,27	5,34	6,14	4,29	5,00	6,91	5,77	7,32	8,60
Sensible cooling capacity	kW	1,94	2,73	3,18	2,07	2,98	3,49	2,99	3,76	4,30	3,20	4,05	4,72	2,97	3,78	5,68	3,80	4,87	5,78
Water flow rate system side	l/h	460	634	731	501	711	824	675	841	946	734	918	1.056	738	860	1.189	992	1.259	1.479
Pressure drop system side	kPa	13	22	29	18	33	43	16	24	30	10	14	18	10	12	22	15	22	30
Fan																			
Type	type	Centrifugal			Centrifugal			Centrifugal			Centrifugal			Centrifugal			Centrifugal		
Fan motor	type	Inverter			Inverter			Inverter			Inverter			Inverter			Inverter		
Number	no.	2			2			3			3			3			3		
Air flow rate	m^3/h	400	600	720	400	600	720	700	930	1140	700	930	1140	700	930	1140	700	930	1140
Input power	W	7	18	31	4	10	19	30	40	80	30	40	80	30	40	80	30	40	80
Signal 0-10V	%	50	74	90	50	74	90	56	72	90	56	72	90	56	72	90	56	72	90
Fan coil sound data (4)																			
Sound power level	dB(A)	42,0	51,0	56,0	42,0	51,0	56,0	50,0	57,0	62,0	50,0	57,0	62,0	51,0	57,0	62,0	51,0	57,0	62,0
Sound pressure level	dB(A)	34,0	43,0	48,0	34,0	43,0	48,0	42,0	49,0	54,0	42,0	49,0	54,0	43,0	49,0	54,0	43,0	49,0	54,0
Finned pack heat exchanger																			
Water content main heat exchanger	l	1,0			1,4			1,2			1,6			1,8			2,3		
Diametre hydraulic fittings																			
Main heat exchanger	Ø	3/4"			3/4"			3/4"			3/4"			3/4"			3/4"		

(1) Room air temperature 20 °C d.b.; Water (in/out) 70 °C/60 °C
(2) Room air temperature 20°C d.b.; Water (in/out) 45°C/40°C; EUROVENT (listing FCU AERMEC 2025)
(3) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT (listing FCU AERMEC 2025)
(4) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

4-pipe

		FCZI201P			FCZI301P			FCZI401P			FCZI501P			FCZI701P			FCZI901P		
		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 65 °C / 55 °C (1)																			
Heating capacity	kW	1,02	1,35	1,60	1,80	2,18	2,56	2,21	2,65	3,12	2,59	3,34	3,73	3,66	4,29	4,94	4,73	5,63	5,72
Water flow rate system side	l/h	89	118	140	158	191	224	186	232	273	227	293	327	320	375	437	414	492	501
Pressure drop system side	kPa	4	8	10	16	23	30	4	6	8	6	8	10	11	14	18	8	12	12
Cooling performance 7 °C / 12 °C (2)																			
Cooling capacity	kW	0,89	1,28	1,60	1,68	2,17	2,65	2,20	2,92	3,60	2,68	3,69	4,25	3,92	4,89	5,50	4,29	5,00	6,91
Sensible cooling capacity	kW	0,71	1,05	1,33	1,26	1,65	2,04	1,59	2,14	2,67	1,94	2,73	3,18	2,99	3,76	4,30	2,97	3,78	5,68
Water flow rate system side	l/h	153	221	275	288	374	456	379	503	619	460	634	731	675	841	946	738	860	1.189
Pressure drop system side	kPa	6	12	18	8	13	18	10	16	24	13	22	29	16	24	30	10	12	22
Fan																			
Type	type	Centrifugal																	
Fan motor	type	Inverter																	
Number	no.	1			2			2			2			3			3		
Air flow rate	m^3/h	140	220	290	260	350	450	330	460	600	400	600	720	700	930	1140	700	930	1140
Input power	W	7	8	14	5	7	13	5	10	18	7	16	31	30	40	80	30	40	80
Signal 0-10V	%	44	68	90	52	70	90	49	68	90	50	74	90	56	72	90	56	72	90
Fan coil sound data (3)																			
Sound power level	dB(A)	35,0	46,0	51,0	34,0	41,0	48,0	37,0	44,0	51,0	42,0	51,0	56,0	50,0	57,0	62,0	51,0	57,0	62,0
Sound pressure level	dB(A)	27,0	38,0	43,0	26,0	33,0	40,0	29,0	36,0	43,0	34,0	43,0	48,0	42,0	49,0	54,0	43,0	49,0	54,0
Finned pack heat exchanger																			
Water content main heat exchanger	l	0,5			0,8			1,0			1,0			1,2			1,8		
Water content secondary heat exchanger	l	0,2			0,3			0,3			0,3			0,4			0,7		
Diametre hydraulic fittings																			
Main heat exchanger	Ø	1/2"			3/4"			3/4"			3/4"			3/4"			3/4"		
Secondary heat exchanger	Ø	1/2"																	

(1) Room air temperature 20°C d.b.; Water (in/out) 65 °C/55 °C; EUROVENT (listing FCU AERMEC 2025)
(2) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT (listing FCU AERMEC 2025)
(3) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

PERFORMANCE DATA FOR UNITS WITH HEAD (EUROVENT CERTIFICATE FCP-H)

2-pipe

		FCZI200P			FCZI250P			FCZI300P			FCZI350P			FCZI400P			FCZI450P			FCZI500P			FCZI550P		
		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)																									
Heating capacity	kW	1,81	3,16	3,34	2,01	3,40	3,62	3,08	4,83	5,23	3,32	5,43	5,83	3,96	5,85	6,34	4,10	6,44	6,96	5,39	7,28	7,63	5,92	8,37	8,71
Water flow rate system side	l/h	156	272	287	173	292	311	265	415	450	285	467	502	341	503	545	353	554	599	464	626	656	509	720	749
Pressure drop system side	kPa	6	13	16	7	17	19	7	14	16	7	17	19	9	17	19	5	12	13	12	22	23	11	20	21
Heating performance 45 °C / 40 °C (2)																									
Heating capacity	kW	0,90	1,57	1,66	1,00	1,69	1,80	1,53	2,40	2,60	1,65	2,70	2,90	1,97	2,91	3,15	2,04	3,20	3,46	2,68	3,62	3,79	2,94	4,16	4,33
Water flow rate system side	l/h	155	270	288	172	291	308	263	413	447	284	464	499	339	501	542	351	550	595	461	623	652	506	715	745
Pressure drop system side	kPa	6	13	16	7	17	19	7	14	16	7	17	19	9	17	19	5	12	13	12	22	23	11	20	21
Cooling performance 7 °C / 12 °C (3)																									
Cooling capacity	kW	0,80	1,37	1,45	0,95	1,67	1,76	1,40	2,38	2,53	1,66	2,70	2,88	2,03	2,98	3,21	2,22	3,28	3,55	2,73	3,68	3,84	2,97	4,15	4,31
Sensible cooling capacity	kW	0,63	1,13	1,20	0,70	1,29	1,37	1,10	1,82	1,94	1,15	1,94	2,07	1,45	2,18	2,36	1,54	2,35	2,56	1,98	2,73	2,85	2,11	2,98	3,12
Water flow rate system side	l/h	138	236	249	163	287	303	241	409	435	285	464	495	349	512	552	382	564	610	469	633	660	511	714	741
Pressure drop system side	kPa	5	13	16	8	17	19	7	14	16	9	17	19	9	17	19	8	12	13	13	22	23	12	20	21
Fan																									
Type	type	Centrifugal																							
Fan motor	type	Inverter																							
Number	no.	1			1			2			2			2			2			2			2		
Air flow rate	m^3/h	123	240	257	123	240	257	225	390	424	225	390	424	300	470	515	300	470	515	410	600	630	410	600	630
High static pressure	Pa	13	50	57	13	50	57	16	50	59	16	50	53	20	50	60	20	50	56	23	50	55	23	50	55
Input power	W	7	27	31	7	27	31	10	11	40	10	30	40	14	38	48	14	38	48	18	50	60	18	50	60
Signal 0-10V	%	43	84	90	43	84	90	48	83	90	48	83	90	52	82	90	52	82	90	58	85	90	58	85	90
Duct type fan coil sound data (4)																									
Sound power level (inlet + radiated)	dB(A)	37,0	57,0	59,0	37,0	57,0	59,0	36,0	50,0	53,0	36,0	50,0	53,0	43,0	53,0	55,0	43,0	53,0	55,0	45,0	56,0	57,0	45,0	56,0	57,0
Sound power level (outlet)	dB(A)	33,0	53,0	55,0	33,0	53,0	55,0	32,0	47,0	49,0	32,0	47,0	49,0	39,0	49,0	52,0	39,0	49,0	52,0	42,0	52,0	52,0	42,0	52,0	52,0
Finned pack heat exchanger																									
Water content main heat exchanger	l	0,5			0,7			0,8			1,0			1,0			1,4			1,0			1,4		
Diametre hydraulic fittings																									
Main heat exchanger	Ø	1/2"			1/2"			3/4"			3/4"			3/4"			3/4"			3/4"			3/4"		

		FCZI700P			FCZI750P			FCZI900P			FCZI950P		
		1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)													
Heating capacity	kW	5,33	8,34	8,88	6,17	9,52	10,15	6,58	11,15	11,87	6,68	11,63	12,66
Water flow rate system side	l/h	468	732	779	541	835	890	566	958	1.021	574	1.000	1.088
Pressure drop system side	kPa	8	17	20	5	11	12	5	13	14	6	17	19
Heating performance 45 °C / 40 °C (2)													
Heating capacity	kW	2,67	4,15	4,40	2,46	4,69	5,00	3,27	5,54	5,90	3,32	5,78	6,29
Water flow rate system side	l/h	460	720	767	418	806	860	562	953	1.015	571	994	1.082
Pressure drop system side	kPa	8	18	20	3	11	12	5	13	14	6	17	19
Cooling performance 7 °C / 12 °C (3)													
Cooling capacity	kW	2,20	4,00	4,30	2,60	4,41	4,70	2,81	4,80	5,20	3,58	6,00	6,46
Sensible cooling capacity	kW	1,71	3,00	3,20	1,90	3,30	3,50	2,10	3,60	3,90	2,33	3,94	4,27
Water flow rate system side	l/h	378	688	739	447	760	818	483	825	894	616	1.032	1.111
Pressure drop system side	kPa	7	18	20	4	11	12	5	13	14	7	17	19
Fan													
Type	type	Centrifugal											
Fan motor	type	Inverter											
Number	no.	3			3			3			3		
Air flow rate	m^3/h	405	730	799	405	730	799	405	730	799	405	730	799
High static pressure	Pa	15	50	60	15	50	60	15	50	60	15	50	60
Input power	W	21	61	78	21	61	78	21	61	78	21	61	78
Signal 0-10V	%	46	82	90	46	82	90	45	84	90	45	84	90
Duct type fan coil sound data (4)													
Sound power level (inlet + radiated)	dB(A)	41,0	55,0	58,0	41,0	55,0	58,0	44,0	55,0	58,0	44,0	55,0	58,0
Sound power level (outlet)	dB(A)	36,0	51,0	54,0	36,0	51,0	54,0	40,0	51,0	54,0	40,0	51,0	54,0
Finned pack heat exchanger													
Water content main heat exchanger	l	1,2			1,6			1,8			2,3		
Diametre hydraulic fittings													
Main heat exchanger	Ø	3/4"											


(1) Room air temperature 20 °C d.b.; Water (in/out) 70 °C/60 °C
(2) Room air temperature 20°C d.b.; Water (in/out) 45°C/40°C; EUROVENT (listing FCU AERMEC 2025)
(3) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT (listing FCU AERMEC 2025)
(4) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

4-pipe

		FCZI201P			FCZI301P			FCZI401P			FCZI501P			FCZI701P			FCZI901P		
		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 65 °C / 55 °C (1)																			
Heating capacity	kW	0,94	1,42	1,49	1,60	2,34	2,47	1,99	2,69	2,85	2,62	3,59	3,45	2,99	3,70	3,92	3,17	5,09	5,47
Water flow rate system side	l/h	81	122	128	138	201	212	171	231	245	225	309	297	257	318	337	273	438	470
Pressure drop system side	kPa	4	9	9	6	12	13	4	7	8	6	9	9	8	12	13	4	10	11
Cooling performance 7 °C / 12 °C (2)																			
Cooling capacity	kW	0,80	1,37	1,45	1,40	2,38	2,53	2,03	2,98	3,21	2,73	3,68	3,84	2,20	4,00	4,30	2,80	4,80	5,24
Sensible cooling capacity	kW	0,63	1,13	1,20	1,10	1,82	1,94	1,45	2,18	2,36	1,98	2,73	2,85	1,71	3,00	3,20	2,10	3,60	3,90
Water flow rate system side	l/h	138	236	249	241	409	435	349	512	552	469	633	660	378	688	739	482	825	901
Pressure drop system side	kPa	5	14	16	7	15	17	9	13	20	13	23	25	6	18	20	5	12	13
Fan																			
Type	type	Centrifugal																	
Fan motor	type	Inverter																	
Number	no.	1			2			2			2			3			3		
Air flow rate	m^3/h	123	240	257	225	390	424	300	470	515	410	600	630	405	730	799	405	730	799
High static pressure	Pa	13	50	57	16	50	59	20	50	60	23	50	55	15	50	60	15	50	60
Input power	W	7	27	31	10	31	40	14	38	58	18	50	60	21	61	78	21	61	78
Signal 0-10V	%	43	84	90	48	83	90	52	82	90	58	85	90	46	82	90	45	84	90
Duct type fan coil sound data (3)																			
Sound power level (inlet + radiated)	dB(A)	37,0	57,0	59,0	36,0	50,0	53,0	43,0	53,0	55,0	45,0	56,0	57,0	41,0	55,0	58,0	41,0	55,0	58,0
Sound power level (outlet)	dB(A)	33,0	53,0	55,0	32,0	47,0	49,0	39,0	49,0	52,0	42,0	52,0	52,0	36,0	51,0	54,0	36,0	51,0	54,0
Finned pack heat exchanger																			
Water content main heat exchanger	l	0,5			0,8			1,0			1,0			1,2			1,8		
Water content secondary heat exchanger	l	0,2			0,3			0,3			0,3			0,4			0,7		
Diametre hydraulic fittings																			
Main heat exchanger	Ø	1/2"			3/4"			3/4"			3/4"			3/4"			3/4"		
Secondary heat exchanger	Ø	1/2"																	

(1) Room air temperature 20°C d.b.; Water (in/out) 65 °C/55 °C; EUROVENT (listing FCU AERMEC 2025)
(2) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT (listing FCU AERMEC 2025)
(3) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

DIMENSIONS

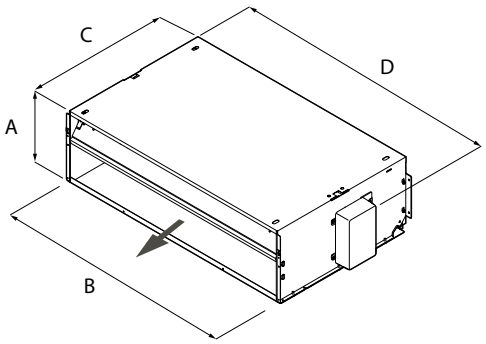

		FCZI200P	FCZI200PAF	FCZI250P	FCZI250PAF	FCZI300P	FCZI300PAF
Dimensions and weights							
A	mm	216	-	216	-	216	-
B	mm	522	-	522	-	753	-
C	mm	453	-	453	-	453	-
D	mm	562	-	562	-	793	-
Net weight	kg	12,0	-	14,0	-	14,0	-

		FCZI350P	FCZI400P	FCZI400PAF	FCZI450P	FCZI500P	FCZI500PAF
Dimensions and weights							
A	mm	216	216	-	216	216	-
B	mm	753	973	-	973	973	-
C	mm	453	453	-	453	453	-
D	mm	793	1013	-	1013	1013	-
Net weight	kg	16,0	20,0	-	22,0	23,0	-

		FCZI550P	FCZI550PAF	FCZI700P	FCZI700PAF	FCZI750P	FCZI750PAF
Dimensions and weights							
A	mm	216	-	216	-	216	-
B	mm	973	-	1122	-	1122	-
C	mm	453	-	453	-	453	-
D	mm	1013	-	1147	-	1147	-
Net weight	kg	24,0	-	29,0	-	31,0	-

		FCZI900P	FCZI900PAF	FCZI950P	FCZI950PAF	Pre_acc
Dimensions and weights						
A	mm	216	-	216	-	-
B	mm	1122	-	1122	-	-
C	mm	558	-	558	-	-
D	mm	1147	-	1147	-	-
Net weight	kg	32,0	-	32,0	-	-

		FCZI201P	FCZI202P	FCZI301P	FCZI302P	FCZI401P	FCZI402P
Dimensions and weights							
A	mm	216	216	216	216	216	216
B	mm	522	522	753	753	973	973
C	mm	453	453	453	453	453	453
D	mm	562	562	793	793	1013	1013
Net weight	kg	13,0	14,0	15,0	16,0	21,0	22,0

		FCZI501P	FCZI502P	FCZI701P	FCZI702P	FCZI901P
Dimensions and weights						
A	mm	216	216	216	216	216
B	mm	973	973	1122	1122	1122
C	mm	453	453	453	453	558
D	mm	1013	1013	1147	1147	1147
Net weight	kg	23,0	24,0	30,0	31,0	32,0

Aermec reserves the right to make any modifications deemed necessary. All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com