

# VED 430-741

## Fan coil unit for ducted installations



- Horizontal and vertical installation
- Ventilation group to 5 speed
- Large range of available static pressure
- Inspectable ventilation group



### DESCRIPTION

Ducted fan coil, for heating, cooling and dehumidifying. Designed to maintain the set temperature over time, ensuring very low sound levels. Can be installed in any 2/4 pipe system and operates with any heat generator even at low temperatures. Thanks to the availability of various options, with standard or increased coil, for horizontal or vertical installation, it is easy to choose the optimal solution for any need.

### FEATURES

#### Case

Unit for internal installation. Internally insulated structure with class 1 fire resistance and IP20 protection.

#### Ventilation group

Centrifugal fans in anti-static plastic material with aerofoil profile designed to achieve high airflows and pressures whilst at the same time producing low noise.

Their characteristics permit energy savings compared to conventional fans. They are statically and dynamically balanced and directly coupled to the motor shaft.

The electric motor is single-phase multi-speed (3 selectable), mounted on anti-vibration supports and with a permanently inserted capacitor.

Fan housing in plastic material removable for easy and effective cleaning.

#### Heat exchanger coil

With copper pipes and aluminium louvers, the main heat exchanger has female gas water connections on the left side and the manifolds have air vents.

The coil is not suitable for use in corrosive atmosphere or in environments where aluminium may be subject to corrosion.

■ *The hydraulic connections can be inverted during installation.*

#### Air filter


Air filter Class G3, for easy removal and cleaning.

### Controls and Accessoires

There is a wide selection of controls and a huge choice of accessories, to meet every system requirement.

The unit is supplied with the delivery connection supplied.

### ACCESSORIES

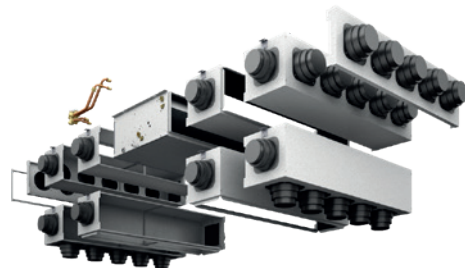

#### Control panels

**AER503IR:** Flush-mounting thermostat with backlit display, capacitive keypad and infrared receiver, for controlling both brushless fan coils and those with an asynchronous motor. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices (Cold Plasma and germicidal lamp), with radiant plate or with FCZ-D twin delivery (Dualjet). In addition, it can control systems with radiant panels or mixed (fan coil and radiant floor) systems. Being equipped with an infrared receiver, it can, in turn, be controlled by the VMF-IR remote control.

**PRO503:** Wall box for AER503IR and VMF-E4 thermostats.

**SA5:** air probe kit (L = 15 m) with probe-locking cable grommet.

**SIT3:** Thermostat Interface Card allowing the creation of a network of fan coils (max. 10) commanded by a central control panel (selector or thermostat). Commands the 3 fan speeds and must be installed on each fan coil within the network; receives the commands from the selector or the SIT5 card. In case you decide to install Aermec thermostats and current absorbed by the unit exceeds 0.7 A, you're obliged to include SIT3 accessory.

**SIT5:** Thermostat Interface Card allowing the creation of a network of fan coils (max. 10) commanded by a central control panel. Commands the 3 fan

speeds and up to 2 valves (four pipe systems); sends the thermostat's commands to the fan coil network.

**SW3:** Water probe (L = 2.5 m) for controlling the minimum and maximum and to allow automatic seasonal switching for electronic thermostats fitted with water side changeover.

**SW5:** water probe kit (L = 15m) with probe-holder connection point, fixing clip and probe-holder from heat exchanger.

**TX:** Wall-mounting thermostat for controlling either brushless fan coils or those with asynchronous motors for 2/4 pipe. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices, radiant plate or FCZ-D twin delivery (DUALJET).

**WMT10:** Electronic thermostat, white, with thermostated or continuous ventilation.

**WMT16:** Electronic thermostat with thermostated ventilation.

**WMT16CV:** Electronic thermostat with continuous ventilation.

### AerSuite

The AerSuite application is used to remotely control the DI24 user interface, with VMF-E19/VMF-E19I thermostats, using Smart Devices with iOS and Android operating systems.

This is an application for Smartphones and Tablets with which the user can access and control the system operation remotely.

For more information about the use of the application and the available functions, refer to the respective documentation on the website.



### VMF system

**DI24:** Flush-mounted interface (503 box) with 2.4" touch screen display to be combined with VMF-E19, VMF-E19I accessories. It allows you to regulate and monitor the temperature inside rooms precisely and on time; in addition to accessing and interacting with your system's operating information, parameters and alarms, it allows you to set time slots. Thanks to its Wi-Fi connection, DI24 in combination with the AerSuite APP (available for Android and iOS) can also be remotely controlled. All programming and most functions are done in a simple and intuitive way using the APP. To allow for customization of the interface so that it seamlessly integrates with the style of any home, DI24 is compatible with switch plates from major brands available on the market. For more information, please refer to our documentation. However, a switch plate with its graphite gray support, DI24CP, is also available as a separate accessory in our catalog.

**VMF-DSK:** User interface with an easy-to-read light display that provides clear information on room temperature, programming settings and more. Thanks to the ergonomic ring nut switch, adjusting the desired temperature is very easy. The knob allows precise and immediate adjustments, offering a classic but highly effective control mode. Not only functional, but also aesthetically pleasing. Our interface features a modern, compact design that fits perfectly in any environment, adding a touch of style to your home or office. It is available in white (VMF-DSK) and black (VMF-DSKD).

**VMF-E19:** Thermostat to be secured to the side of the fan coil, fitted as standard with an air probe and a water probe.

**VMF-E3:** Wall-mounted user interface, also controllable via VMF-IR control.

**VMF-E4DX:** Wall-mounted user interface. Grey front panel PANTONE 425C (METAL).

**VMF-E4X:** Wall-mounted user interface. Light grey front panel PANTONE COOL GRAY 1C.

**VMF-IO:** Manage the unit exclusively from a centralized VMF control panel without area control panel.

**VMF-IR:** User interface compatible with AER503IR, VMF-E3 thermostat.

**VMF-MOD:** Expansion board for the management of modulating valves.

**VMF-SIT3V:** Relay interface board. Mandatory accessory on units where motor absorption exceeds 0.7 A. The relay interface board is supplied with a

2A fuse to protect the fan coil. If the fan coil absorbs more than 2A and up to 4A, the fuse inside must be replaced with a 4A fuse supplied.

**VMF-SW:** Water probe (L = 2.5m) used if required in place of the standard unit supplied with the VMF-E19 and VMF-E19I thermostats for mounting it upstream of the valve.

**VMF-SW1:** Additional water probe (L = 2.5m) to be used if required for 4-pipe systems with the VMF-E19 and VMF-E19I thermostats for maximum control in the cold range

**VMHI:** The VMHI panel can be used as a user interface. What determines the function to be performed by the user interface is determined by its correct parametrisation and by following the electrical connections between interface and thermostat or interface and plenum.

### Water valves

**VJP:** Control and balancing combination valve for 2 and 4 pipe systems to install outside the unit, supplied without fittings and hydraulic components. The valve, which can guarantee a constant water flow rate in the terminal, within its operating range.

**VCT:** These are 3-way ball valves made of bronze, with female/female connections Ø 1/2". That can be servo-activated via servo commands. The valves do not have fittings and pipes for water connections, which are the installer's responsibility.

**VCT:** These are 3-way ball valves made of bronze, with female/female connections Ø 1/2". That can be servo-activated via servo commands. The valves do not have fittings and pipes for water connections, which are the installer's responsibility.

**VCTK:** The VCT series valves can be combined with the actuators On-Off 230V. The actuator must be selected according to the type of system/adjustment provided.

**VCTKM:** The VCT series valves can be combined with the actuators 24V modulating. The actuator must be selected according to the type of system/adjustment provided.

**VCF45C - 47C - 47CS - for main heat exchanger:** 3-way motorised valve kit for the main coil. The kit is made up of a valve with its insulating shell, actuator and relative hydraulic fittings. It can be installed on fan coils with both right and left connections. If the valve is combined with the BCZ5 or BCZ6 condensate drain pan, to ensure a better housing it is possible to remove the insulating shell.

**VCF45H - 47H - for heating only heat exchanger:** Motorized 3-way valve kit for hot only coil. The kit consists of a 3-way 4-way valve, the actuator and its hydraulic fittings, it is suitable for installation on both fan coil units with hydraulic connections on the right and left.

**VCF25C - 25CS - for main coil:** 2-way motorized valve kit for main coil. The kit consists of a valve with its insulating shell, the actuator and the relative hydraulic fittings, it is suitable for installation on both fan coil units with hydraulic connections on the right and left.

**VCF25H - for heating only coil:** 2-way motorized valve kit for hot only coil. The kit consists of a valve, actuator and relative hydraulic fittings, it is suitable for installation on both fan coils with hydraulic connections on the right and left.

**BCV:** Condensate drip.

### Installation accessories

**MZC:** Plenum with motorised dampers.

**RDA\_V:** Straight intake connection with rectangular flange.

**RPA\_V:** Suction plenum with rectangular flange; both sides have a circular push-out Ø 150mm that can be removed.

**PA\_V:** Suction plenum with circular plastic flanges; both sides have a circular push-out Ø 150mm that can be removed.

**PM\_V:** Internally insulated delivery plenum with circular flanges; both sides have a circular push-out Ø 150mm that can be removed.

**RPM\_V:** Internally insulated delivery plenum with rectangular flange; both sides have a circular push-out Ø 150mm that can be removed.

**KFV:** Circular flanges kit for plenum.

**MZCACV:** Electrical system with relay interface board. Mandatory accessory on units where motor absorption exceeds 0.7 A. The relay interface board is supplied with a 2A fuse to protect the fan coil. If the fan coil absorbs more than 2A and up to 4A, the fuse inside must be replaced with a 4A fuse supplied.

**MZCAC:** Mandatory electrical system for connecting the MZC plenum with a fan coil fitted with an asynchronous motor.

## Configurator

Field	Description
1,2,3,4	VED4
5	Size 4,5,6,7
6	main heat exchanger
3	3-row coil
4	4-row coil
7	Secondary heat exchanger
0	Without coil
1	1-row coil for heating only
2	2-row coil for heating only (on request only)

## ACCESSORIES COMPATIBILITY

### Control panels and dedicated accessories

Model	Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
AER503IR (1)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
PRO503	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SA5 (2)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SIT3 (3)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SITS (4)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW3 (2)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW5 (2)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
TX (5)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
WMT10 (5)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
WMT16 (5)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
WMT16CV (5)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

- (1) Wall-mount installation.  
 (2) Probe for AER503IR-TX thermostats, if fitted.  
 (3) Cards for AER503IR-TX thermostats, if present, to be installed if the unit absorption exceeds 0,7 Ampere.  
 (4) Probe for AER503IR-TX thermostats, if fitted.  
 (5) Wall-mounting. If the unit intake exceeds 0.7A, or several units need to be managed with a single thermostat, board SIT3 and/or SITS is required.

### VMF system

Model	Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
DI24	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-DSK	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E19 (1)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E3	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E4DX	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E4X	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-IO	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-IR	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-MOD	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-SIT3V (2)	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-SW	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-SW1	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMHI	.	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

- (1) Also the accessory VMF-SIT3V is mandatory if the unit exceeds 0.7 Amperes.  
 (2) For the selection, consult the documentation for the thermostat and the fan coil.

### Water valves

#### 3 way valve kit

	VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
<b>3 way valve kit</b>								
Main heat exchanger	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C
	VED630	VED632	VED640	VED641	VED730	VED732	VED740	VED741
<b>3 way valve kit</b>								
Main heat exchanger	VCF47C	VCF47C	VCF47CS	VCF47CS	VCF47C	VCF47C	VCF47CS	VCF47CS
	VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
<b>3 way valve kit</b>								
Main heat exchanger	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C	VCF45C
Secondary heat exchanger for four pipes	-	VCF45H	-	VCF45H	-	VCF45H	-	VCF45H
	VED630	VED632	VED640	VED641	VED730	VED732	VED740	VED741
<b>3 way valve kit</b>								
Main heat exchanger	VCF47C	VCF47C	VCF47CS	VCF47CS	VCF47C	VCF47C	VCF47CS	VCF47CS
Secondary heat exchanger for four pipes	-	VCF47H	-	VCF47H	-	VCF47H	-	VCF47H

230V power supply - Hydraulic connection Ø 3/4"

#### 2 way valve kit

	VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
<b>2 way valve kit</b>								

	VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
Main heat exchanger	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C
	VED630	VED632	VED640	VED641	VED730	VED732	VED740	VED741
<b>2 way valve kit</b>								
Main heat exchanger	VCF25C	VCF25C	VCF25CS	VCF25CS	VCF25C	VCF25C	VCF25CS	VCF25CS
	VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
Main heat exchanger	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C	VCF25C
Secondary heat exchanger for four pipes	-	VCF25H	-	VCF25H	-	VCF25H	-	VCF25H
	VED630	VED632	VED640	VED641	VED730	VED732	VED740	VED741
<b>2 way valve kit</b>								
Main heat exchanger	VCF25C	VCF25C	VCF25CS	VCF25CS	VCF25C	VCF25C	VCF25CS	VCF25CS
Secondary heat exchanger for four pipes	-	VCF25H	-	VCF25H	-	VCF25H	-	VCF25H

230V power supply - Hydraulic connection Ø 3/4"

**2-way globe valves actuator excluded**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	VCT102	VCT102	VCT102	VCT102	VCT102	VCT102	VCT102	VCT102	VCT202	VCT202	VCT202	VCT202	VCT202	VCT202	VCT202	VCT202

**3-way globe valves actuator excluded**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	VCT103	VCT103	VCT103	VCT103	VCT103	VCT103	VCT103	VCT103	VCT203	VCT203	VCT203	VCT203	VCT203	VCT203	VCT403	VCT403

**Actuator 230V**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK	VCTK

**Actuator 24V**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM	VCTKM

**Combined adjustment and balancing valve cold side**

Model	Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
VJP150 (1)	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
VJP150M (2)	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
VJP270M (2)	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.

(1) 230V~50Hz  
(2) 24V

**VJP/VJP\_M the compatibility of the hot water valves with the designed air flow in a four-pipe installation is to be verified.**

**Accessories for intake**

**Intake straight with rectangular flanges**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	RDA450V	RDA450V	RDA450V	RDA450V	RDA450V	RDA450V	RDA450V	RDA450V	RDA670V	RDA670V	RDA670V	RDA670V	RDA670V	RDA670V	RDA670V	RDA670V

**Intake plenum with rectangular flanges**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	RPA450V	RPA450V	RPA450V	RPA450V	RPA450V	RPA450V	RPA450V	RPA450V	RPA670V	RPA670V	RPA670V	RPA670V	RPA670V	RPA670V	RPA670V	RPA670V

**Intake plenum with circular flanges**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	PA450V	PA450V	PA450V	PA450V	PA450V	PA450V	PA450V	PA450V	PA670V	PA670V	PA670V	PA670V	PA670V	PA670V	PA670V	PA670V

**Delivery accessories**

**Delivery plenum internally insulated, with rectangular flanges**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	RPM450V	RPM450V	RPM450V	RPM450V	RPM450V	RPM450V	RPM450V	RPM450V	RPM670V	RPM670V	RPM670V	RPM670V	RPM670V	RPM670V	RPM670V	RPM670V

**Delivery plenum internally insulated, with circular flanges**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	PM450V	PM450V	PM450V	PM450V	PM450V	PM450V	PM450V	PM450V	PM670V	PM670V	PM670V	PM670V	PM670V	PM670V	PM670V	PM670V

**Circular flanges kit for plenum**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV	KFV

**Condensate drip**

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	BCV45	BCV45	BCV45	BCV45	BCV45	BCV45	BCV45	BCV45	BCV67	BCV67	BCV67	BCV67	BCV67	BCV67	BCV67	BCV67

## MZC

### Plenum with motor-driven dampers

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	MZC5040	MZC5040	MZC5040	MZC5040	MZC5040	MZC5040	MZC5040	MZC5040	MZC7050	MZC7050	MZC7050	MZC7050	MZC7050	MZC7050	MZC7050	MZC7050

### Electric plant

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	MZCAC	MZCAC	MZCAC	MZCAC	MZCAC	MZCAC	MZCAC	MZCAC	MZCAC	MZCAC	-	-	-	-	-	-

The accessory cannot be fitted on the configurations indicated with -

### Electrical system with relays

Ver	430	432	440	441	530	532	540	541	630	632	640	641	730	732	740	741
.	-	-	-	-	-	-	-	-	-	-	-	MZCACV (1)	MZCACV (1)	MZCACV (1)	MZCACV (1)	MZCACV (1)

(1) It is mandatory to use MZCACV if the intake of the unit combined with the MZC accessory exceeds 0.7 Ampere.

The accessory cannot be fitted on the configurations indicated with -

■ For more information, please refer to the MZC plenum sheet.

## PERFORMANCE SPECIFICATIONS

### 2-pipe

	VED430			VED440			VED530			VED540			VED630			VED640			VED730			VED740		
	1	3	5	1	3	5	2	4	5	2	4	5	1	3	5	1	3	5	1	3	5	1	3	5
	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H

#### Heating performance 70 °C / 60 °C (1)

Heating capacity	kW	10,47	13,85	15,97	11,45	15,36	18,11	13,80	16,47	17,57	15,38	18,59	19,91	18,63	22,67	27,02	22,45	27,74	32,69	21,18	25,36	29,00	22,88	27,65	31,71
Water flow rate system side	l/h	918	1.214	1.401	1.004	1.347	1.588	1.210	1.444	1.541	1.349	1.630	1.746	1.634	1.988	2.369	1.969	2.433	2.867	1.857	2.224	2.543	2.007	2.425	2.781
Pressure drop system side	kPa	9	14	19	11	18	24	13	15	21	18	25	29	30	43	58	19	29	38	38	55	67	26	36	46

#### Heating performance 45 °C / 40 °C (2)

Heating capacity	kW	5,20	5,88	7,94	5,69	7,64	9,01	6,86	8,19	8,74	7,45	9,24	9,90	9,26	11,20	13,40	9,88	12,40	14,80	10,50	12,60	14,20	11,30	13,70	15,70
Water flow rate system side	l/h	894	1.183	1.366	979	1.314	1.550	1.180	1.409	1.503	1.281	1.589	1.703	1.593	1.926	2.305	1.699	2.133	2.546	1.806	2.167	2.442	1.944	2.356	2.700
Pressure drop system side	kPa	9	14	19	11	18	24	14	19	21	21	25	30	30	42	58	16	24	32	38	52	66	26	36	35

#### Cooling performance 7 °C / 12 °C (3)

Cooling capacity	kW	4,54	5,98	6,72	5,21	6,88	7,79	5,99	7,16	7,49	7,26	8,31	8,70	8,67	10,43	12,19	10,20	12,50	14,80	10,17	11,92	13,48	11,73	13,95	15,71
Sensible cooling capacity	kW	3,40	4,54	5,13	3,65	4,86	5,51	4,55	5,48	5,75	4,87	5,90	6,18	7,00	8,48	9,96	7,02	8,62	10,30	8,25	9,71	11,07	8,11	9,69	10,95
Water flow rate system side	l/h	781	1.029	1.156	896	1.183	1.340	1.030	1.232	1.288	1.249	1.429	1.496	1.491	1.794	2.097	1.754	2.150	2.546	1.749	2.050	2.319	2.018	2.399	2.702
Pressure drop system side	kPa	8	13	17	10	17	22	12	19	21	19	25	28	26	36	48	24	34	47	35	46	58	27	37	45

### Fan

Type	type	Centrifugal																							
Fan motor	type	Asynchronous																							
Number	no.	2			2			2			2			3			3			3			3		
Air flow rate	m <sup>3</sup> /h	790	1130	1350	780	1100	1340	1120	1400	1520	1100	1380	1500	1380	1800	2210	1567	2004	2440	1640	2040	2410	1600	2000	2350
High static pressure	Pa	24	50	72	-	50	63	32	50	70	32	50	56	30	50	75	30	50	75	32	50	69	32	50	64
Input power	W	137	175	228	135	178	222	175	232	270	172	230	267	220	271	340	220	293	340	234	285	371	234	285	371
Electrical wiring		V1	V3	V5	V1	V3	V5	V2	V4	V5	V2	V4	V5	V1	V3	V5	V1	V3	V5	V1	V3	V5	V1	V3	V5

#### Duct type fan coil sound data (4)

Sound power level (inlet + radiated)	dB(A)	51,0	57,0	61,0	51,0	57,0	61,0	53,0	59,0	62,0	53,0	59,0	62,0	61,0	64,0	68,0	61,0	64,0	68,0	62,0	66,0	68,0	62,0	66,0	68,0
Sound power level (outlet)	dB(A)	47,0	53,0	57,0	47,0	53,0	57,0	49,0	55,0	58,0	49,0	55,0	58,0	57,0	60,0	64,0	57,0	60,0	64,0	58,0	62,0	64,0	58,0	62,0	64,0

#### Diameter hydraulic fittings

Type	type	-																							
Main heat exchanger	Ø	3/4"																							

#### Finned pack heat exchanger

Water content main heat exchanger	l	2,9			3,9			2,9			3,9			4,7			6,3			4,7			6,3		
-----------------------------------	---	-----	--	--	-----	--	--	-----	--	--	-----	--	--	-----	--	--	-----	--	--	-----	--	--	-----	--	--

#### Power supply

Power supply	V/Ph/Hz	230V~50Hz																							
--------------	---------	-----------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

(1) Room air temperature 20 °C d.b.; Water (in/out) 70 °C/60 °C

(2) Room air temperature 20 °C d.b.; Water (in/out) 45 °C/40 °C; EUROVENT (listing FCU AERMEC 2025)

(3) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT (listing FCU AERMEC 2025)

(4) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.

### 4-pipe

	VED441			VED541			VED641			VED741		
	1	3	5	2	4	5	1	3	5	1	3	5
	L	M	H	L	M	H	L	M	H	L	M	H

#### Heating performance 65 °C / 55 °C (1)

Heating capacity	kW	5,53	6,68	7,30	6,70	7,62	7,89	9,65	11,00	12,30	10,50	11,80	12,90
Water flow rate system side	l/h	475	574	627	576	655	678	829	946	1.057	903	1.014	1.109
Pressure drop system side	kPa	14	20	23	20	25	26	15	19	24	18	22	25

#### Cooling performance 7 °C / 12 °C (2)

Cooling capacity	kW	5,35	7,05	8,00	7,46	8,56	8,94	10,40	12,70	15,20	11,90	14,20	16,10
Sensible cooling capacity	kW	3,79	5,03	5,74	5,07	6,14	6,42	7,26	8,92	10,70	8,37	9,96	11,30
Water flow rate system side	l/h	920	1.212	1.376	1.283	1.472	1.537	1.788	2.184	2.614	2.046	2.442	2.769
Pressure drop system side	kPa	12	19	24	21	27	29	24	35	48	27	37	46

### Fan


Type	type	Centrifugal																							
------	------	-------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

		VED441			VED541			VED641			VED741		
Fan motor	type	Asynchronous											
Number	no.	2			2			3			3		
Air flow rate	m <sup>3</sup> /h	750	1060	1253	1060	1360	1453	1340	1730	2120	1600	2000	2358
High static pressure	Pa	25	50	70	32	50	57	30	50	75	32	50	69
Input power	W	121	175	215	170	229	265	224	264	341	224	288	373
Electrical wiring		V1	V3	V5	V2	V4	V5	V1	V3	V5	V1	V3	V5
<b>Duct type fan coil sound data (3)</b>													
Sound power level (inlet + radiated)	dB(A)	51,0	57,0	61,0	53,0	59,0	62,0	61,0	64,0	68,0	62,0	66,0	68,0
Sound power level (outlet)	dB(A)	47,0	53,0	57,0	49,0	55,0	58,0	57,0	60,0	64,0	58,0	62,0	64,0
<b>Diametre hydraulic fittings</b>													
Type	type	-											
Main heat exchanger	Ø	3/4"											
Secondary heat exchanger	Ø	1/2"											
<b>Finned pack heat exchanger</b>													
Water content main heat exchanger	l	3,9			3,9			6,3			6,3		
Water content secondary heat exchanger	l	1,0			1,0			1,6			1,6		
<b>Power supply</b>													
Power supply	V/Ph/Hz	230V~50Hz											
(1) Room air temperature 20°C d.b.; Water (in/out) 65 °C/55 °C; EUROVENT (listing FCU AERMEC 2025)													
(2) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT (listing FCU AERMEC 2025)													
(3) Aermec determines the sound power value on the basis of measurements taken in accordance with standard UNI EN 16583:15, respecting the Eurovent certification.													
<b>VED</b>													
<b>From VED 430 to 741</b>													
Fan speed	V1	V2			V3			V4			V5		
Motor connection	L5	L4			L3			L2			L1		

**The speed of associates may differ from the standard factory configuration.**

**For more information refer to the selection program and to the dedicated documentation.**

## DIMENSIONS

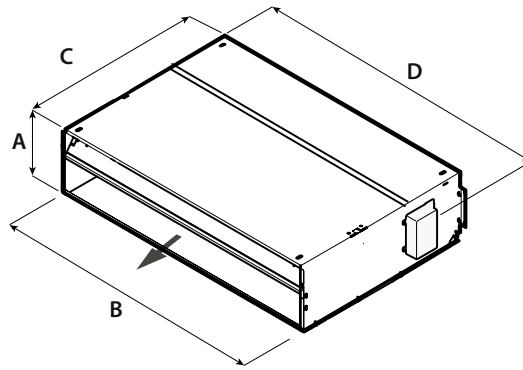

		VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
<b>Dimensions and weights</b>									
A	mm	300	300	300	300	300	300	300	300
B	mm	1133	1133	1133	1133	1133	1133	1133	1133
C	mm	737	737	737	737	737	737	737	737
D	mm	1158	1158	1158	1158	1158	1158	1158	1158
Net weight	kg	41,0	46,0	43,0	46,0	42,0	47,0	47,0	47,0
		VED630	VED632	VED640	VED641	VED730	VED732	VED740	VED741
<b>Dimensions and weights</b>									
A	mm	351	351	351	351	351	351	351	351
B	mm	1533	1533	1533	1533	1533	1533	1533	1533
C	mm	789	789	789	789	789	789	789	789
D	mm	1558	1558	1558	1558	1558	1558	1558	1558
Net weight	kg	57,0	60,0	60,0	60,0	58,0	61,0	61,0	64,0
		VED430	VED432	VED440	VED441	VED530	VED532	VED540	VED541
<b>Dimensions and weights</b>									
A	mm	300	300	300	300	300	300	300	300
B	mm	1133	1133	1133	1133	1133	1133	1133	1133
C	mm	737	737	737	737	737	737	737	737
D	mm	1158	1158	1158	1158	1158	1158	1158	1158
Net weight	kg	41,0	46,0	43,0	46,0	42,0	47,0	47,0	47,0
		VED630	VED632	VED640	VED641	VED730	VED732	VED740	VED741
<b>Dimensions and weights</b>									
A	mm	351	351	351	351	351	351	351	351
B	mm	1533	1533	1533	1533	1533	1533	1533	1533
C	mm	789	789	789	789	789	789	789	789
D	mm	1558	1558	1558	1558	1558	1558	1558	1558
Net weight	kg	57,0	60,0	60,0	60,0	58,0	61,0	61,0	64,0

Aermec reserves the right to make any modifications deemed necessary.  
All data is subject to change without notice. Aermec does not assume  
responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
www.aermec.com