

# NRG 0282-0754 F

## Air-water chiller with free-cooling

Cooling capacity 58 ÷ 190 kW



- High efficiency also at partial loads
- Low refrigerant charge
- Compact dimensions



### DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications.

**These are outdoor units with streamlined scroll compressors used with R32 gas.**

Condensing coil with copper pipes and aluminium louvers, plate heat exchanger.

The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

### VERSIONS

- A** High efficiency
- E** Silenced high efficiency

### FEATURES

#### Operating field

Operation at full load up to 48°C external air temperature. Unit can produce chilled water up to -10 °C.

For more information refer to the selection program and to the dedicated documentation.

#### Dual-circuit unit

The units are dual-circuit, to ensure maximum efficiency both at full load and at partial load.

#### Refrigerant HFC R32

The environmental impact of the units is reduced considerably owing to the last generation R32 (A2L) refrigerant.

Combining a reduced refrigerant load with a low global warming potential (GWP), these units boast low equivalent CO<sub>2</sub> values.

■ *The leak detector is supplied as per standard.*

#### Condensation control temperature

Fitted as standard with a device for electronic condensation control so that the unit can work even with low temperatures, adapting the air flow rate to the actual system request in order to reduce consumption.

### New condensing Coils

**The whole range uses copper - aluminium condensation coils with reduced diameter rows**, allowing a lower quantity of gas to be used compared to traditional coils.

### Free-cooling water coils

These units also have a water coil dedicated to free-cooling mode.

Free-cooling offers significant energy saving in applications that require cooling all year round.

As soon as the outside air temperature allows, a valve makes the water flow towards the free-cooling battery which is cooled directly by the air. The compressors are completely shut down, if possible, leading to considerable electrical savings.

### Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy seasonal efficiency of the unit.

### Option integrated hydronic kit

An optional, integrated hydronic kit containing the main hydraulic components, to obtain a solution that allows you to save money and to facilitate installation.

**It is available in different configurations with storage tank or with fixed pumps also inverter.**

### CONTROL

Microprocessor control, with keyboard and LCD display, for easy access on the unit with a menu available in several languages.

- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Floating HP control:** the function can be activated with inverter fans or with DCPX which allows unit operation to be optimised at any operating point through continuous modulation of the fan speed. In addition, the use of inverter fans ensures an increase in energy efficiency at partial loads.
- **Night mode:** only in the **non-silenced** versions is it possible to set a silenced operating mode, which is useful for example at night for greater

acoustic comfort but always guarantees performance even at peak load times.

## ACCESSORIES

**AER485P1:** RS-485 interface for supervising systems with MODBUS protocol. 1 accessory is provided for each unit control board.

**AERBAC-ONE:** Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols, HTTPS protocol for web interface, encrypted communication protocols and access credential management in accordance with the latest standards. One accessory is provided for each unit control board.

**AERBACP:** Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols. 1 accessory is provided for each unit control board.

**AERLINK:** Aerlink is a WiFi gateway with an RS485 serial port that allows a wide range of Aermec products (heat pumps/chillers/system controllers) equipped with this interface to connect easily and securely to a Wi-Fi network. It works both as an access point (AP access point) and as a client (WiFi Station), it can be connected to a single generator or system centraliser, allowing anyone to easily integrate them into any network. Thanks to the AerApp and AerPlants apps, which can be used on Android and iOS platforms, the remote management of the air conditioning systems developed by Aermec becomes intuitive and simple.

**AERNET:** The device remotely controls, manages and remotely monitors a chiller/heat pump using a PC, smartphone or table via a Cloud connection. AERNET acts as Master while each connected unit is configured as Slave up to a maximum of 6 control cards. The connection is made via cable and/or USB key. Wi-Fi connectivity is not available. It is also possible to save a log file with all the data from the connected units to your terminal with a simple click for possible post-analysis. With the purchase of the Router, the Customer benefits from a 24-month free period during which he can use the Aernet Service at no additional cost. At the end of this initial period, the Service

may be renewed by subscribing to a 1, 2 or 3 year subscription. For further details on costs and renewal methods, please contact our office or consult the technical documentation available on our website. [www.aermec.com](http://www.aermec.com).

**MULTICHILLER-EVO:** Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel (max. no. 9), always ensuring constant flow rate to the evaporators.

**PGD1:** Allows you to control the unit at a distance.

**SGD:** Electronic board designed to receive external signals from the electricity grid or energy suppliers, converting them into Modbus commands for our units. This system allows you to vary the operation of our generators to optimise consumption based on electricity prices, grid load or the availability of renewable sources. The key principle of the standard is demand response: shifting consumption from peak demand times to times when energy is cheaper and more environmentally sustainable.

**PR4:** Remote panel with LCD display and touch keyboard that allows carrying out the basic controls, the programming of time ranges and the signalling of the alarms of a single unit.

■ *The accessory PR4 should only be combined with the RS485 communication interface when the serial port is occupied by another device.*

**GP:** Anti-intrusion grid.

**VT:** Anti-vibration supports.

## FACTORY FITTED ACCESSORIES

**DRE:** Electronic device for peak current reduction.

**RIF:** Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

**T6:** Double safety valve with exchange cock, both on the high and low pressure branches.

## ACCESSORIES COMPATIBILITY

Model	Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
AER485P1	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
AERBAC-ONE	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
AERBACP	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
AERLINK	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
AERNET	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
MULTICHILLER-EVO	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
PGD1	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*
SGD	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*

## Remote panel

Model	Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
PR4	A					*	*	*	*	*	*	*
	E	*	*	*	*	*	*	*	*	*	*	*

The accessory PR4 should only be combined with the RS485 communication interface when the serial port is occupied by another device.

## Antivibration

Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Integrated hydronic kit: 00, 13, 14, P3, P4</b>											
A	-	-	-	-	VT11	VT11	VT11	VT11	VT22	VT22	VT22
E	VT17	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT22	VT22	VT22
<b>Integrated hydronic kit: 03, 04, K3, K4</b>											
A	-	-	-	-	VT11	VT11	VT11	VT11	VT22	VT22	VT22
E	VT13	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT22	VT22	VT22

## Anti-intrusion grid

Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
A	-	-	-	-	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)			
E	GP4	GP4	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)			

(1) x \_ indicates the quantity to buy

The accessory cannot be fitted on the configurations indicated with -

## Device for peak current reduction

Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
A	-	-	-	-	DRENRG502FC	DRENRG552FC	DRENRG554	DRENRG604	DRENRG654N	DRENRG704	DRENRG754

Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
E	DRENRG282FC	DRENRG302FC	DRENRG332FC	DRENRG352FC	DRENRG502FC	DRENRG552FC	DRENRG554	DRENRG604	DRENRG654N	DRENRG704	DRENRG754

The accessory cannot be fitted on the configurations indicated with -  
A grey background indicates the accessory must be assembled in the factory

#### Power factor correction

Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
A	-	-	-	-	RIFNRG502FC	RIFNRG552FC	RIFNRG554	RIFNRG604	RIFNRG654N	RIFNRG704	RIFNRG754
E	RIFNRG282FC	RIFNRG302FC	RIFNRG332FC	RIFNRG352FC	RIFNRG502FC	RIFNRG552FC	RIFNRG554	RIFNRG604	RIFNRG654N	RIFNRG704	RIFNRG754

The accessory cannot be fitted on the configurations indicated with -  
A grey background indicates the accessory must be assembled in the factory

#### Double safety valves

Ver	0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
A, E	T6NRG2										

A grey background indicates the accessory must be assembled in the factory

## CONFIGURATOR

Field	Description
<b>1,2,3</b>	<b>NRG</b>
<b>4,5,6,7</b>	<b>Size</b> 0282, 0302, 0332, 0352, 0502, 0552, 0554, 0604, 0654, 0704, 0754
<b>8</b>	<b>Operating field</b>
X	Electronic thermostatic expansion valve
Z	Low temperature electronic thermostatic valve
<b>9</b>	<b>Model</b>
F	Free-cooling
S	Free-cooling with special 3-way valve
<b>10</b>	<b>Heat recovery</b>
D	With desuperheater
°	Without heat recovery
<b>11</b>	<b>Version</b>
A	High efficiency
E	Silenced high efficiency (1)
<b>12</b>	<b>Coils / free-cooling coils</b>
R	Copper-copper/Copper-copper
V	Copper-painted aluminium / Copper-painted aluminium
°	Copper-aluminium / Copper-aluminium
<b>13</b>	<b>Fans</b>
J	Inverter (2)
°	Standard
<b>14</b>	<b>Power supply</b>
°	400V ~ 3N 50Hz with magnet circuit breakers
<b>15,16</b>	<b>Integrated hydronic kit</b>
00	Without hydronic kit
	<b>Kit with storage tank and pump/s</b>
03	Storage tank with high head pump
04	Storage tank with high head pump + stand-by pump
	<b>Kit with pump/s</b>
P3	Single pump high head
P4	Pump high head + stand-by pump
	<b>Kit with inverter pump/s to fixed speed</b>
I3	Single high head pump + fixed speed inverter
I4	Single high head pump with fixed speed inverter + stand-by pump
	<b>Kit with storage tank and inverter pump/s to fixed speed</b>
K3	Single high head pump + storage tank + fixed speed inverter
K4	Storage tank and low head pump with fixed speed inverter + stand-by pump

(1) The size 0282-0302-0332-0352 only available in low noise versions.

(2) As standard in sizes from 0282 to 0352

## PERFORMANCE SPECIFICATIONS

### NRG - A

Size		0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	-	-	-	-	100,8	111,4	116,9	134,7	148,5	168,3	190,0
Input power	kW	-	-	-	-	31,5	35,1	38,4	43,2	49,0	58,5	67,0
Cooling total input current	A	-	-	-	-	60,00	63,00	63,00	83,00	94,00	114,00	123,00
EER	W/W	-	-	-	-	3,20	3,18	3,05	3,12	3,03	2,88	2,84
Water flow rate system side	l/h	-	-	-	-	17.316	19.137	20.081	23.139	25.509	28.916	32.647
Pressure drop system side	kPa	-	-	-	-	43	52	44	60	72	84	85
<b>Cooling performances with free-cooling (2)</b>												
Cooling capacity	kW	-	-	-	-	73,2	75,6	76,6	89,6	92,2	95,1	97,5
Input power	kW	-	-	-	-	3,7	3,7	3,8	5,6	5,6	5,6	5,6
Free cooling total input current	A	-	-	-	-	7,0	6,6	6,3	11,0	11,0	11,0	10,0
EER	W/W	-	-	-	-	19,94	20,59	20,14	16,15	16,62	17,14	17,56
Water flow rate system side	l/h	-	-	-	-	17.316	19.137	20.081	23.139	25.509	28.916	32.647
Pressure drop system side	kPa	-	-	-	-	63	76	71	65	78	90	93

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / \* °C ; Aria esterna 2 °C

### NRG - E

Size		0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	58,5	64,5	71,8	81,3	98,0	108,0	112,6	131,2	144,0	162,0	181,4
Input power	kW	18,7	22,1	24,7	30,4	32,0	36,0	39,7	44,1	50,1	60,7	70,5
Cooling total input current	A	33,28	43,51	50,29	61,68	57,77	61,94	63,27	79,97	91,00	112,57	123,31
EER	W/W	3,13	2,92	2,91	2,67	3,06	3,00	2,83	2,98	2,87	2,67	2,57
Water flow rate system side	l/h	100.338	11.082	12.338	13.965	16.843	18.547	19.341	22.540	24.736	27.830	31.164
Pressure drop system side	kPa	21	24	29	28	40	49	41	57	68	78	77
<b>Cooling performances with free-cooling (2)</b>												
Cooling capacity	kW	39,2	44,0	48,8	51,0	73,2	75,6	76,6	89,6	92,2	95,1	97,5
Input power	kW	0,8	0,8	1,1	1,1	3,7	3,7	3,8	5,6	5,6	5,6	5,6
Free cooling total input current	A	1,5	1,7	2,2	2,2	6,6	6,3	6,1	10,1	10,1	10,3	9,7
EER	W/W	46,65	52,31	45,70	47,80	19,94	20,59	20,14	16,15	16,62	17,14	17,56
Water flow rate system side	l/h	10.057	11.082	12.338	13.966	16.843	18.547	19.341	22.540	24.736	27.830	31.165
Pressure drop system side	kPa	35	31	40	41	59	71	66	61	74	84	85

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / \* °C ; Aria esterna 2 °C

## ENERGY DATA BY TYPE OF FAN

Size		0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754	
<b>SEPR - (EN 14825: 2018)</b>													
SEPR	A	W/W	-	-	-	-	6,43	6,30	7,50	7,56	7,17	6,57	6,34
	E	W/W	7,11	6,66	6,65	6,21	6,34	6,14	7,16	7,24	7,02	6,39	6,12
Water Regulation (1)	A	type	-	-	-	-	FW/FO						
	E	type	FW/FO										

(1) VW/VO - variable water flow rate/variable outlet temperature; FW/VO - fixed water flow rate/variable outlet temperature; VW/FO - variable water flow rate/fixed outlet temperature; FW/FO - fixed water flow rate/fixed outlet temperature.

## ELECTRIC DATA

Size		0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754	
<b>Electric data</b>													
Maximum current (FLA)	A	A	-	-	-	-	73,5	79,1	80,5	100,1	111,4	132,7	144,0
	E	A	42,3	50,7	58,0	68,7	73,5	79,1	80,5	100,1	111,4	132,7	144,0
Peak current (LRA)	A	A	-	-	-	-	276,8	282,5	200,8	224,2	226,7	287,7	353,0
	E	A	162,7	174,8	173,3	223,7	276,8	282,5	200,8	224,2	226,7	287,7	353,0

■ Data calculated without hydronic kit and accessories.

## GENERAL TECHNICAL DATA

### Refrigerant circuit

Size			0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Compressor</b>													
Type	A,E	type	Scroll										
Compressor regulation	A,E	type	On/Off										
Number	A,E	no.	2	2	2	2	2	2	4	4	4	4	4
Circuits	A,E	no.	2	2	2	2	2	2	2	2	2	2	2
Refrigerant	A,E	type	R32										
Total refrigerant charge (1)	A	kg	-	-	-	-	11,97	17,95	20,61	20,61	22,17	24,03	27,90
	E	kg	7,54	8,36	8,36	10,67	11,97	11,97	13,74	13,74	14,78	16,02	18,60
Potential global heating (GWP)	A		-	-	-	-	675	675	675	675	675	675	675
	E		675	675	675	675	675	675	675	675	675	675	675
Equivalent CO <sub>2</sub>	A	tCO <sub>2</sub> ,eq	-	-	-	-	8,08	12,12	13,91	13,91	14,96	16,22	18,83
	E	tCO <sub>2</sub> ,eq	5,09	5,64	5,64	7,20	8,08	8,08	9,27	9,27	9,98	10,81	12,56

(1) The load indicated in the table is an estimated and preliminary value. The final value of the refrigerant load is indicated on the unit's technical label. For further information contact the office.

### System side heat exchanger

Size			0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>System side heat exchanger</b>													
Type	A,E	type	Brazed plate										
Number	A,E	no.	1	1	1	1	1	1	1	1	1	1	1
<b>System side hydraulic connections</b>													
Sizes (in/out)	A,E	Ø	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2

### Fans


Size			0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Fan</b>													
Type	A,E	type	Axial										
Number	A	no.	-	-	-	-	2	2	2	3	3	3	3
	E	no.	6	6	8	8	2	2	2	3	3	3	3
Air flow rate	A	m <sup>3</sup> /h	-	-	-	-	36079	36079	36079	54481	54481	54481	54481
	E	m <sup>3</sup> /h	23294	22734	26915	26915	27483	27483	27483	41449	41449	41449	41449

### Sound data

Size			0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Sound data calculated in cooling mode (1)</b>													
Sound power level	A	dB(A)	-	-	-	-	85,1	85,6	84,2	86,4	86,4	86,4	86,4
	E	dB(A)	73,0	73,9	74,3	74,5	81,3	82,1	76,1	77,5	77,5	77,5	77,5

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

## DIMENSIONS

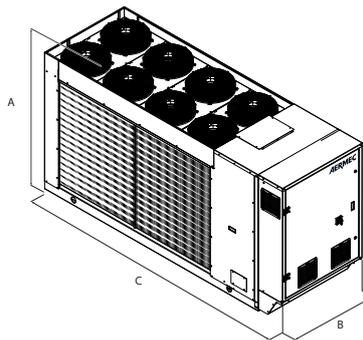

Size			0282	0302	0332	0352	0502	0552	0554	0604	0654	0704	0754
<b>Dimensions and weights</b>													
A	A	mm	-	-	-	-	1907	1907	1907	1900	1900	1900	1900
	E	mm	1658	1658	1658	1658	1907	1907	1907	1900	1900	1900	1900
B	A	mm	-	-	-	-	1100	1100	1100	1100	1100	1100	1100
	E	mm	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
C	A	mm	-	-	-	-	3567	3567	3567	4467	4467	4467	4467
	E	mm	3317	3317	3317	3317	3567	3567	3567	4467	4467	4467	4467

Aermec reserves the right to make any modifications deemed necessary. All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

**Aermec S.p.A.**

Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
www.aermec.com