

NYG 0500

Air-cooled reversible modular heat pump

Cooling capacity 26.68 – 29.9 Ton
Heating capacity 329200 – 379273 BTU/h



- Easy and quick to install compact
- Reliability and modularity



DESCRIPTION

Reversible outdoor heat pumps for the production of chilled/heated water designed to satisfy the needs of residential and commercial buildings, or for industrial applications.

These are outdoor units with streamlined scroll compressors used with R454B gas.

The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

FEATURES

Operating field

Working at full load up to -4.0 °F outside air temperature in winter, and up to 115.0 °F in summer. Possibility production technical hot water production up to 150 °F

For more information refer to the selection program and to the dedicated documentation.

Modularity

Possibility of coupling several units designed to minimise the overall footprint.

Silent

Silent at the highest levels thanks to the inverter fans used in both the standard (J) and oversized (M) should be enhanced – the latter also offer high static pressure.

Reliability

- The electrical panel on each module and the management logic via the Multichiller_EVO accessory, which allows the modules to work in synergy with each other, ensure continuity of service even if one unit malfunctions.
- Modularity is essential when component redundancy is required, as it allows for a safer system design and increased reliability.
- Possibility of using them in a system with fixed or variable flow rates.
- Possibility of excluding individual modules with valves on every unit in case of maintenance.

R454B refrigerant gas.

Use refrigerant fluid R454B, whose classification according to ISO 817 is A2L.

The environmental impact of the units is reduced considerably owing to the last generation R454B refrigerant. Combining a reduced refrigerant load with a low global warming potential (GWP), these units boast low equivalent CO₂ values.

Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy seasonal efficiency of the unit.

Also joint production of hot/cold water

Besides choosing the components carefully, we decided to provide a plug and play unit to also manage the hydraulic circuit, allowing the type of unit for 2 or 4 pipe systems in the configurator to be chosen.

- **In the 2-pipe configuration**, the production of hot or cold water is alternated according to need.
- **In the 4-pipe configuration**, hot or cold water can also be produced simultaneously if several modules are installed. The throttle valves on each module, independent of each other, allow the water produced on the collector of the hot or cold circuit to be switched according to the operating mode of the single unit established by the Multichiller_EVO, according to the cooling / heat load required by the system.

CONTROL PCO⁵

Microprocessor control, with keyboard and LCD display, for easy access on the unit with a menu available in several languages.

- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Floating HP control:** available for all models with an inverter fan. Thanks to continuous fan modulation, unit operation is optimised in every working position in cooling mode. The result is enhanced machine energy efficiency with partial loads.
- **Night Mode:** it is possible to set a silenced operation profile. Perfect for night operation since it guarantees greater acoustic comfort in the evenings, and a high efficiency in the time of greater load.

ACCESSORIES

AER485P1: RS-485 interface for supervising systems with MODBUS protocol. 1 accessory is provided for each unit control board.

AERBAC-ONE: Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols, HTTPS protocol for web interface, encrypted communication protocols and access credential management in accordance with the latest standards. One accessory is provided for each unit control board.

AERNET: The device remotely controls, manages and remotely monitors a chiller/heat pump using a PC, smartphone or table via a Cloud connection. AERNET acts as Master while each connected unit is configured as Slave up to a maximum of 6 control cards. The connection is made via cable and/or USB key. Wi-Fi connectivity is not available. It is also possible to save a log file with all the data from the connected units to your terminal with a simple click for possible post-analysis. With the purchase of the Router, the Customer benefits from a 24-month free period during which he can use the Aernet

Service at no additional cost. At the end of this initial period, the Service may be renewed by subscribing to a 1, 2 or 3 year subscription. For further details on costs and renewal methods, please contact our office or consult the technical documentation available on our website. www.aermec.com.

MULTICHILLER-EVO: Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel (max. no. 9), always ensuring constant flow rate to the evaporators.

PGD1: Allows you to control the unit at a distance.

FACTORY FITTED ACCESSORIES

KNYB: Pair of caps with grooved joints assembled on the unit manifold.

KRQ: Electric heater for the control and electric power board.

BRC1R: Condensate drip tray with heater. Consider 1 for each V-block.

GPNYG_SIDE_2: Anti-intrusion grid.

GPNYG_SIDE_4: Anti-intrusion grid.

GPNYG_BACK: Anti-intrusion grid.

ACCESSORIES COMPATIBILITY

Model	0500
AER485P1	.
AERBAC-ONE	.
AERNET	.
MULTICHILLER-EVO	.
PGD1	.

Anti-intrusion grid

0500
GPNYG_BACK

A grey background indicates the accessory must be assembled in the factory

0500
GPNYG_SIDE_2 (1)

(1) For 2-pipe units

A grey background indicates the accessory must be assembled in the factory

0500
GPNYG_SIDE_4 (1)

(1) For 4-pipe units

A grey background indicates the accessory must be assembled in the factory

Electric heater for the control and electric power board

0500
KRQ_NYG_M

A grey background indicates the accessory must be assembled in the factory

CRATE

0500
CRATE_NYG

Condensate drip with resistance

0500
BRC1R (1)

(1) Consider 1 for each V-block.

A grey background indicates the accessory must be assembled in the factory

CONFIGURATOR

Field	Description
1,2,3	NYG
4,5,6,7	Size 0500
8	Operating field
X	Electronic thermostatic expansion valve (1)
Z	Low temperature electronic thermostatic valve (2)
9	Model
G	Heat pump - Vapour injection scroll compressors - Extended heating envelope up to 140F LWT
H	Heat pump - Standard scroll compressors - Standard heating envelope
K	Heat pump - Vapour injection scroll compressors - Extended heating envelope up to 149F LWT
10	Heat recovery
D	With desuperheater
°	Without heat recovery
11	Coils
V	Copper pieps-Coated aluminium fins
°	Copper-aluminium

Field	Description
12	Fans
J	Inverter
M	Enhanced EC inverter (3)
13	Power supply
6	230V - 3 60Hz
7	460V - 3 60Hz
8	575V - 3 60Hz
9	208V - 3 60Hz
14,15	Integrated hydronic kit
00	145 psi rated
0P	300 psi rated
16	System type
2	2-pipe system
4	4-pipe system

(1) Outlet water temperature from +39,2°F

(2) Water outlet temperature below +39.2 °F

(3) Option not available with 575V power supply

PERFORMANCE SPECIFICATIONS

		NYG 0500H	NYG 0500G	NYG 0500K
Cooling performance 54.01 °F / 44.01 °F (1)				
Cooling capacity	ton	26.68	29.9	29.9
Input power	kW	31.51	35.8	35.8
EER	BTU/(Wh)	10.16	10.06	10.06
IPLV	BTU/(Wh)	13.27	13.31	13.31
Water flow rate system side	gpm	63.83	71.6	71.6
Pressure drop system side	ft H ₂ O	8.31	8.31	8.31
Heating performance 104 °F / 113 °F (2)				
Heating capacity	BTU/h	329200	379273	379273
Input power	kW	34.70	36.9	36.9
COP	kW/kW	2.781	3.02	3.02
Water flow rate system side	gpm	62.02	71.4	71.4
Pressure drop system side	ft H ₂ O	7.85	8.27	8.27

(1) Reference conditions: AHRI std 550/590 I-P; Service side water 54.01°F / 44.01°F; Outside air 95°F

(2) Reference conditions: AHRI std 550/590 I-P; Service side water 104 °F / 113 °F; Outside air 44.6 °F

		NYG 0500H	NYG 0500G	NYG 0500K
Partialisations EER				
100 %	BTU/Wh	10,13	10,07	10,07
75 %	BTU/Wh	11,94	12,01	12,01
50 %	BTU/Wh	14,02	14,02	14,02
25 %	BTU/Wh	15,32	15,42	15,42

GENERAL TECHNICAL DATA

		NYG 0500H	NYG 0500G	NYG 0500K
Compressor				
Type	type	Scroll	Scroll	Scroll
Compressor regulation	Type	On-Off	On-Off	On-Off
Number	no.	2	2	2
Circuits	no.	2	2	2
Refrigerant	type	R454B	R454B	R454B
Total refrigerant charge (1)	lbs	33.1	39.7	39.7
System side heat exchanger				
Type	type	Brazed plate	Brazed plate	Brazed plate
Number	no.	1	1	1
Hydraulic connections				
Connections (in/out)	Type	Grooved joints	Grooved joints	Grooved joints
Size (in)	Ø	6"	6"	6"
Size (out)	Ø	6"	6"	6"

(1) The load indicated in the table is an estimated and preliminary value. The final value of the refrigerant load is indicated on the unit's technical label. For further information contact the office.

ELECTRIC DATA

Size			0500
Power supply: 230V			
Peak current (LRA)	J	A	430
	M	A	441
Minimum circuit amperage (MCA)	J	A	150
	M	A	175
Maximum overcurrent permitted by the protection device (MOP)	J	A	175
	M	A	200
Nominal Short-Circuit Current (SCCR)	J,M	kA	65
Power supply: 460V			
Peak current (LRA)	J	A	238
	M	A	243
Minimum circuit amperage (MCA)	J,M	A	80
Maximum overcurrent permitted by the protection device (MOP)	J,M	A	100
Nominal Short-Circuit Current (SCCR)	J,M	kA	65
Power supply: 575V			
Peak current (LRA)	J	A	171
	M	A	-
Minimum circuit amperage (MCA)	J	A	70
	M	A	-
Maximum overcurrent permitted by the protection device (MOP)	J	A	90
	M	A	-
Nominal Short-Circuit Current (SCCR)	J	kA	50
	M	kA	-
Power supply: 208V			
Peak current (LRA)	J	A	430
	M	A	441
Minimum circuit amperage (MCA)	J	A	150
	M	A	175
Maximum overcurrent permitted by the protection device (MOP)	J	A	175
	M	A	200
Nominal Short-Circuit Current (SCCR)	J,M	kA	65

Electric data (G)

Size			0500
Power supply: 230V			
Peak current (LRA)	J	A	430
	M	A	441
Minimum circuit amperage (MCA)	J	A	150
	M	A	175
Maximum overcurrent permitted by the protection device (MOP)	J	A	175
	M	A	200
Nominal Short-Circuit Current (SCCR)	J,M	kA	65
Power supply: 460V			
Peak current (LRA)	J	A	238
	M	A	243
Minimum circuit amperage (MCA)	J,M	A	80
Maximum overcurrent permitted by the protection device (MOP)	J,M	A	100
Nominal Short-Circuit Current (SCCR)	J,M	kA	65
Power supply: 575V			
Peak current (LRA)	J	A	171
	M	A	-
Minimum circuit amperage (MCA)	J	A	70
	M	A	-
Maximum overcurrent permitted by the protection device (MOP)	J	A	90
	M	A	-
Nominal Short-Circuit Current (SCCR)	J	kA	50
	M	kA	-
Power supply: 208V			
Peak current (LRA)	J	A	430
	M	A	441
Minimum circuit amperage (MCA)	J	A	150
	M	A	175
Maximum overcurrent permitted by the protection device (MOP)	J	A	175
	M	A	200
Nominal Short-Circuit Current (SCCR)	J,M	kA	65

Electric data (K)

Size	0500		
Power supply: 230V			
Peak current (LRA)	J	A	440
	M	A	451
Minimum circuit amperage (MCA)	J	A	175
	M	A	200
Maximum overcurrent permitted by the protection device (MOP)	J,M	A	225
Nominal Short-Circuit Current (SCCR)	J,M	kA	65
Power supply: 460V			
Peak current (LRA)	J	A	241
	M	A	247
Minimum circuit amperage (MCA)	J,M	A	90
Maximum overcurrent permitted by the protection device (MOP)	J,M	A	110
Nominal Short-Circuit Current (SCCR)	J,M	kA	65
Power supply: 575V			
Peak current (LRA)	J	A	172
	M	A	-
Minimum circuit amperage (MCA)	J	A	70
	M	A	-
Maximum overcurrent permitted by the protection device (MOP)	J	A	90
	M	A	-
Nominal Short-Circuit Current (SCCR)	J	kA	50
	M	kA	-
Power supply: 208V			
Peak current (LRA)	J	A	440
	M	A	451
Minimum circuit amperage (MCA)	J	A	175
	M	A	200
Maximum overcurrent permitted by the protection device (MOP)	J,M	A	225
Nominal Short-Circuit Current (SCCR)	J,M	kA	65

Data calculated without hydronic kit and accessories.

FANS DATA

		NYG 0500H	NYG 0500G	NYG 0500K
Inverter fan				
Type	type	Axial	Axial	Axial
Fan motor	type	Inverter	Inverter	Inverter
Number	no.	2	2	2
Air flow rate	cfm	21,189	21,189	21,189
Increased fan				
Type	type	Axial	Axial	Axial
Number	no.	2	2	2
Fan motor	type	Inverter	Inverter	Inverter
Air flow rate	cfm	21,189	21,189	21,189
High static pressure - maximum	in-wc	1	1	1

SOUND DATA CALCULATED IN COOLING MODE

Sound data (without high static pressure)

Inverter fan

		NYG 0500H	NYG 0500G	NYG 0500K
Sound data calculated in cooling mode (1)				
Sound power level	dB(A)	89,4	89,4	89,4

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2. Sound pressure (cold functioning) measured in free field, 10 m / 33 ft away from the unit external surface (in compliance with UNI EN ISO 3744).

Increased fan

		NYG 0500H	NYG 0500G	NYG 0500K
Sound data calculated in cooling mode (1)				
Sound power level	dB(A)	89,4	89,4	89,4

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2. Sound pressure (cold functioning) measured in free field, 10 m / 33 ft away from the unit external surface (in compliance with UNI EN ISO 3744).

Sound data (with high static pressure)

Increased fan

		NYG 0500H	NYG 0500G	NYG 0500K
Sound data calculated in cooling mode (1)				
Sound power level	dB(A)	97,4	97,4	97,4
High static pressure - maximum	in-wc	1	1	1

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2. Sound pressure (cold functioning) measured in free field, 10 m / 33 ft away from the unit external surface (in compliance with UNI EN ISO 3744).

SOUND DATA CALCULATED IN HEATING MODE

Sound data (without high static pressure)

Inverter fan

		NYG 0500H	NYG 0500G	NYG 0500K
Sound data calculated in heating mode (1)				
Sound power level	dB(A)	91,8	91,8	91,8

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2. Sound pressure (cold functioning) measured in free field, 10 m / 33 ft away from the unit external surface (in compliance with UNI EN ISO 3744).

Increased fan

		NYG 0500H	NYG 0500G	NYG 0500K
Sound data calculated in heating mode (1)				
Sound power level	dB(A)	91,8	91,8	91,8

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2. Sound pressure (cold functioning) measured in free field, 10 m / 33 ft away from the unit external surface (in compliance with UNI EN ISO 3744).


Sound data (with high static pressure)

Increased fan

		NYG 0500H	NYG 0500G	NYG 0500K
Sound data calculated in heating mode (1)				
Sound power level	dB(A)	99,8	99,8	99,8
High static pressure - maximum	in-wc	1	1	1

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2. Sound pressure (cold functioning) measured in free field, 10 m / 33 ft away from the unit external surface (in compliance with UNI EN ISO 3744).

DIMENSIONS

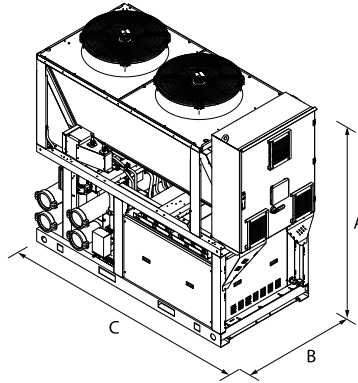

Model H

Size				0500
Dimensions and weights				
A	J	in	96.5	
	M	in	99.6	
B	J,M	in	46.9	
C	J,M	in	106.9	

Model G

Size				0500
Dimensions and weights				
A	J	in	96.5	
	M	in	99.6	
B	J,M	in	46.9	
C	J,M	in	106.9	

Model K

Size				0500
Dimensions and weights				
A	J	in	96.5	
	M	in	99.6	
B	J,M	in	46.9	
C	J,M	in	106.9	

WEIGHTS

		NYG 0500H	NYG 0500G	NYG 0500K
2-pipe				
Empty weight	lbs	2,895	3,159	3,159
Weight functioning	lbs	3,049	3,314	3,314
4-pipe				
Empty weight	lbs	3,027	3,292	3,292
Weight functioning	lbs	3,269	3,534	3,534

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com



A series of horizontal dotted lines spanning the width of the page, providing a guide for handwriting practice.