

WWBG

Water-water heat pumps only

Heating capacity 77,2 ÷ 138,2 kW

- Optimised to produce high temperature hot water
- Can be used with any air or water cooled heat pump
- Max. processed water temperature: 80 °C
- Max inlet temperature on source side: 45 °C



DESCRIPTION

WWBG is a range of irreversible water-water heat pumps that produce high temperature water with a low or medium temperature source. Internal unit suitable for use in centralised residential systems, in systems that serve hotels and other forms of accommodation, and for applications in the tertiary and industrial sectors.

FEATURES

Maximum energy efficiency

Aermec, which has focused for years on energy efficiency, designed the WWBG units with the aim of guaranteeing high efficiency both with full and partial loads.

Operating field

With its wide operating range, it can be integrated with numerous applications and is a valid alternative to boilers and all conventional systems used to produce high temperature hot water since it also uses existing systems. Production of hot water up to 80 °C (Max inlet temperature on source side 45 °C).

Constructional characteristics of unit

- Optimised plate heat exchangers with low pressure drops.
- 2 cooling circuits, 1 compressor per circuit.
- Scroll compressors for high condensing temperatures.
- Compact size for easier installation.

The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

R513A (XP10) refrigerant gas

Thanks to the R513A (XP10) refrigerant, the environmental impact of the units is significantly reduced.

Combining a reduced refrigerant load with a low global warming potential (GWP), these units boast low equivalent CO₂ values.

CONTROL

Control unit accessible externally with touch-screen user interface, multilingual display of all operating parameters.

Optimised control logic for use with low and medium temperature heat pumps.

Complies with safety (EC) and electromagnetic compatibility directives.

Removable slide-out electrical panel with opening side (LH/RH side) configurator option

ACCESSORIES

AER485P1: RS-485 interface for supervising systems with MODBUS protocol. 1 accessory is provided for each unit control board.

AERBAC-ONE: Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols, HTTPS protocol for web interface, encrypted communication protocols and access credential management in accordance with the latest standards. One accessory is provided for each unit control board.

AERBAC: Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols. 1 accessory is provided for each unit control board.

AERNET: The device remotely controls, manages and remotely monitors a chiller/heat pump using a PC, smartphone or table via a Cloud connection. AERNET acts as Master while each connected unit is configured as Slave up to a maximum of 6 control cards. The connection is made via cable and/or USB key. Wi-Fi connectivity is not available. It is also possible to save a log file with all the data from the connected units to your terminal with a simple click for possible post-analysis. With the purchase of the Router, the Customer benefits from a 24-month free period during which he can use the Aernet Service at no additional cost. At the end of this initial period, the Service may be renewed by subscribing to a 1, 2 or 3 year subscription. For further details on costs and renewal methods, please contact our office or consult the technical documentation available on our website, www.aermec.com.

MULTICHILLER-EVO: Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel (max. no. 9), always ensuring constant flow rate to the evaporators.

PGD1: Allows you to control the unit at a distance.

SGD: Electronic expansion that enables connecting to the photovoltaic system and heat pumps to accumulate heat in the DHW tank or in the heating

system during the photovoltaic production phase and release it at times when heating demand is highest.

VT: Anti-vibration supports.

PR4: Remote panel with LCD display and touch keyboard that allows carrying out the basic controls, the programming of time ranges and the signalling of the alarms of a single unit.

■ The accessory PR4 should only be combined with the RS485 communication interface when the serial port is occupied by another device.

FACTORY FITTED ACCESSORIES

RIF: Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

ACCESSORIES COMPATIBILITY

Model	Ver	0330	0350	0550	0600
AER485P1	L
AERBAC-ONE	L
AERBACP	L
AERNET	L
MULTICHILLER-EVO	L
PGD1	L
SGD	L

MULTICHILLER_EVO: Contact the factory for compatibility of the accessory with the type of implant envisaged.

Antivibration

Ver	0330	0350	0550	0600
L	VT9	VT9	VT9	VT15

PR4

Model	Ver	0330	0350	0550	0600
PR4	L

Power factor correction

Ver	0330	0350	0550	0600
L	RIFWWBG0330	RIFWWBG0350	RIFWWBG0550	RIFWWBG0600

A grey background indicates the accessory must be assembled in the factory


CONFIGURATOR

Configuration options

Field	Description
1,2,3,4	WWBG
5,6,7,8	Size 0330, 0350, 0550, 0600
9	Operating field X Standard
10	Model H Heat pump
11	Version L Silenced

Field	Description
12	Power supply
S	400V ~ 3 50Hz with Soft-Start
◦	400V ~ 3 50Hz
13	Electrical panel version
R	Reverse opening (RH)
◦	Standard opening (LH)
14	Leak detector
G	with leak detector
◦	Without leak detector

Example of four-pipe system

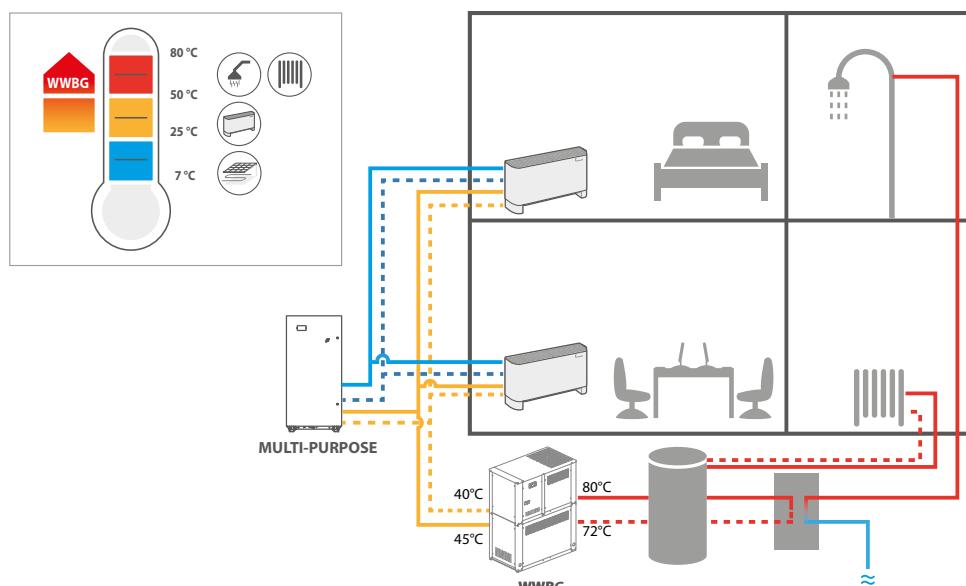

PERFORMANCE SPECIFICATIONS

Size	0330	0350	0550	0600	
Heating performances (Water user side 70 °C / 78 °C; Water source side 45 °C / 40 °C) (1)					
Heating capacity	kW	77,2	92,4	115,2	138,0
Input power	kW	18,3	21,8	27,8	33,5
COP	W/W	4,21	4,24	4,14	4,12
Water flow rate system side	l/h	8.484	10.159	12.665	15.163
Pressure drop system side	kPa	10	14	21	31
Water flow rate source side	l/h	10.249	12.299	15.233	18.209
Pressure drop source side	kPa	15	10	15	7
Heating performances (Water user side 70 °C / 78 °C; Water source side 35 °C / 30 °C) (2)					
Heating capacity	kW	62,9	75,4	94,0	112,5
Input power	kW	18,1	21,5	27,5	33,0
COP	W/W	3,47	3,50	3,42	3,41
Water flow rate system side	l/h	6.921	8.288	10.332	12.369
Pressure drop system side	kPa	6	9	14	20
Water flow rate source side	l/h	7.775	9.337	11.541	13.789
Pressure drop source side	kPa	9	6	9	4
Heating performances (Water user side 47 °C / 55 °C; Water source side 10 °C / 7 °C) (3)					
Heating capacity	kW	40,0	47,9	59,7	71,5
Input power	kW	11,3	13,4	17,1	20,6
COP	W/W	3,55	3,58	3,50	3,49
Water flow rate system side	l/h	4.355	5.216	6.502	7.784
Pressure drop system side	kPa	3	4	6	8
Water flow rate source side	l/h	8.241	9.895	12.235	14.618
Pressure drop source side	kPa	10	6	10	4

(1) Date 14511:2022; Water user side 70 °C / 78 °C; Water source side 45 °C / 40 °C

(2) Date 14511:2022; Water user side 70 °C / 78 °C; Water source side 35 °C / 30 °C

(3) Date 14511:2022; Water user side 47 °C / 55 °C; Water source side 10 °C / 7 °C

ENERGY DATA

Size	0330	0350	0550	0600	
Performance in average ambient conditions (average) - 55 °C(1)					
Efficiency energy class	A+++	A+++	-	-	
Pdesignh	kW	50,92	60,99	76,01	91,00
SCOP	W/W	4,58	4,62	4,53	4,51
ηsh	%	175,00	177,00	173,00	172,00
Water Regulation (2)	type	FW/VO-FW	FW/VO-FW	FW/VO-FW	FW/VO-FW

(1) Efficiencies for average temperature applications (55 °C)

(2) VW/VO - variable water flow rate/variable outlet temperature; FW/VO - fixed water flow rate/variable outlet temperature; VW/FO - variable water flow rate/fixed outlet temperature; FW/FO - fixed water flow rate/fixed outlet temperature.

ELECTRIC DATA

Size	0330	0350	0550	0600	
Electric data					
Maximum current (FLA)	A	40,0	46,0	60,0	72,0
Peak current (LRA)	A	131,0	141,0	170,0	210,0
Peak current with Soft-start	A	66,0	71,0	85,0	105,0

GENERAL TECHNICAL DATA

Refrigerant circuit

Size	0330	0350	0550	0600	
Compressor					
Type	type	Scroll	Scroll	Scroll	
Compressor regulation	Type	On-Off	On-Off	On-Off	
Number	no.	2	2	2	
Circuits	no.	2	2	2	
Refrigerant	type	R513A	R513A	R513A	
Total refrigerant charge (1)	kg	6,20	6,80	8,40	11,60
Potential global heating (GWP)		631	631	631	631
Equivalent CO ₂	tCO ₂ eq	3,91	4,29	5,30	7,32

(1) The load indicated in the table is an estimated and preliminary value. The final value of the refrigerant load is indicated on the unit's technical label. For further information contact the office.

System side heat exchanger

Size	0330	0350	0550	0600
System side heat exchanger				
Type	type	Brazed plate	Brazed plate	Brazed plate
Number	no.	1	1	1
Connections (in/out)	Type	Grooved joints	Grooved joints	Grooved joints
Sizes (in/out)	Ø	2"	2"	2"

Source side heat exchanger

Size	0330	0350	0550	0600
Source side heat exchanger				
Type	type	Brazed plate	Brazed plate	Brazed plate
Number	no.	1	1	1
Connections (in/out)	Type	Grooved joints	Grooved joints	Grooved joints
Sizes (in/out)	Ø	2"	2"	2"


Sound data

Size	0330	0350	0550	0600
Sound data calculated in heating mode (1)				
Sound power level	dB(A)	71,8	71,8	76,1


(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

DIMENSIONS

Removal of electrical panel

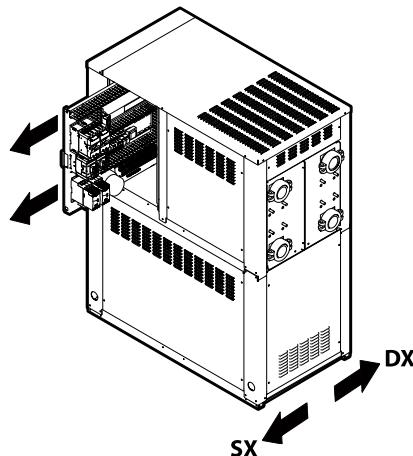

Electrical panel version	Configurator option
Sx - LH side	° (Standard)
Dx - RH side	R

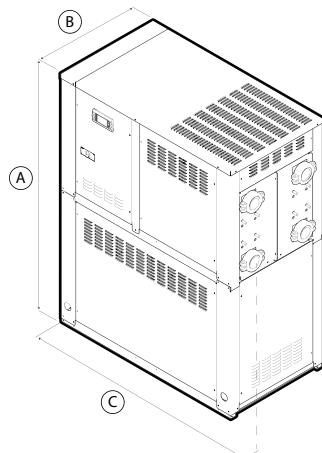

Size	0330	0350	0550	0600
Dimensions and weights				
A	mm	1.650	1.650	1.650
B	mm	710	710	710
C	mm	1.300	1.300	1.300
Weights				
Weight empty + packaging	kg	430	445	455
Weight functioning	kg	430	445	460
				510

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com